
12 x 14FT

WQG-030-2




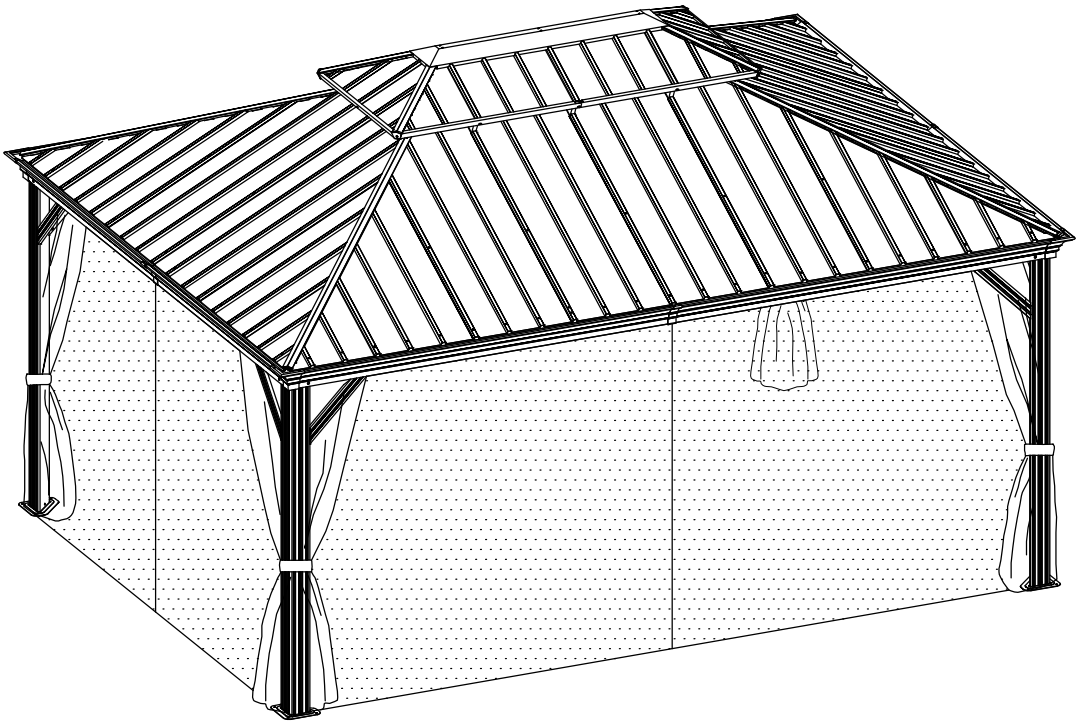


Need at least three people to work together

REQUIRED TOOLS









A 4x



B1 2x



B2 2x




B3 2x



B4 2x



D 4x



D1 6x



E5 4x



C1 4x



C2 4x



C3 2x



G1 2x



G2 2x




F1 4x



F2 4x


F3 2x




I1 2x




I2 2x




H 4x



H1 4x



V1 2x



V2 2x


M2 1x




L2 1x




J 4x




P 4x




V 4x




Q1 6x



Z 64x



Z1 8x



Z2 8x



Y 76x




U 120x




N 12x




N1 6x




K1 4x




K 4x




Q3 8x




Q4 8x




T 4x




T1 4x




X1 4x



X2 4x



X3 4x



X4 4x




X5 4x




X6 4x




X10 2x



S1 4x



S2 4x



S3 2x



M6x15

1 172x



M6x23

2 68x




M6x25

3 12x



ST 4.8x12

4 8x



5 **2x**



M6x45

7 8x



8 16x




M6x10

9 8x



10 12x




11 1x



4mm

12 2x



14 1x




M5x15

15 32x




A 4x



J 4x



Q3 8x



Q4 8x



M6x15


1 12x



M5x15

15 32x


5

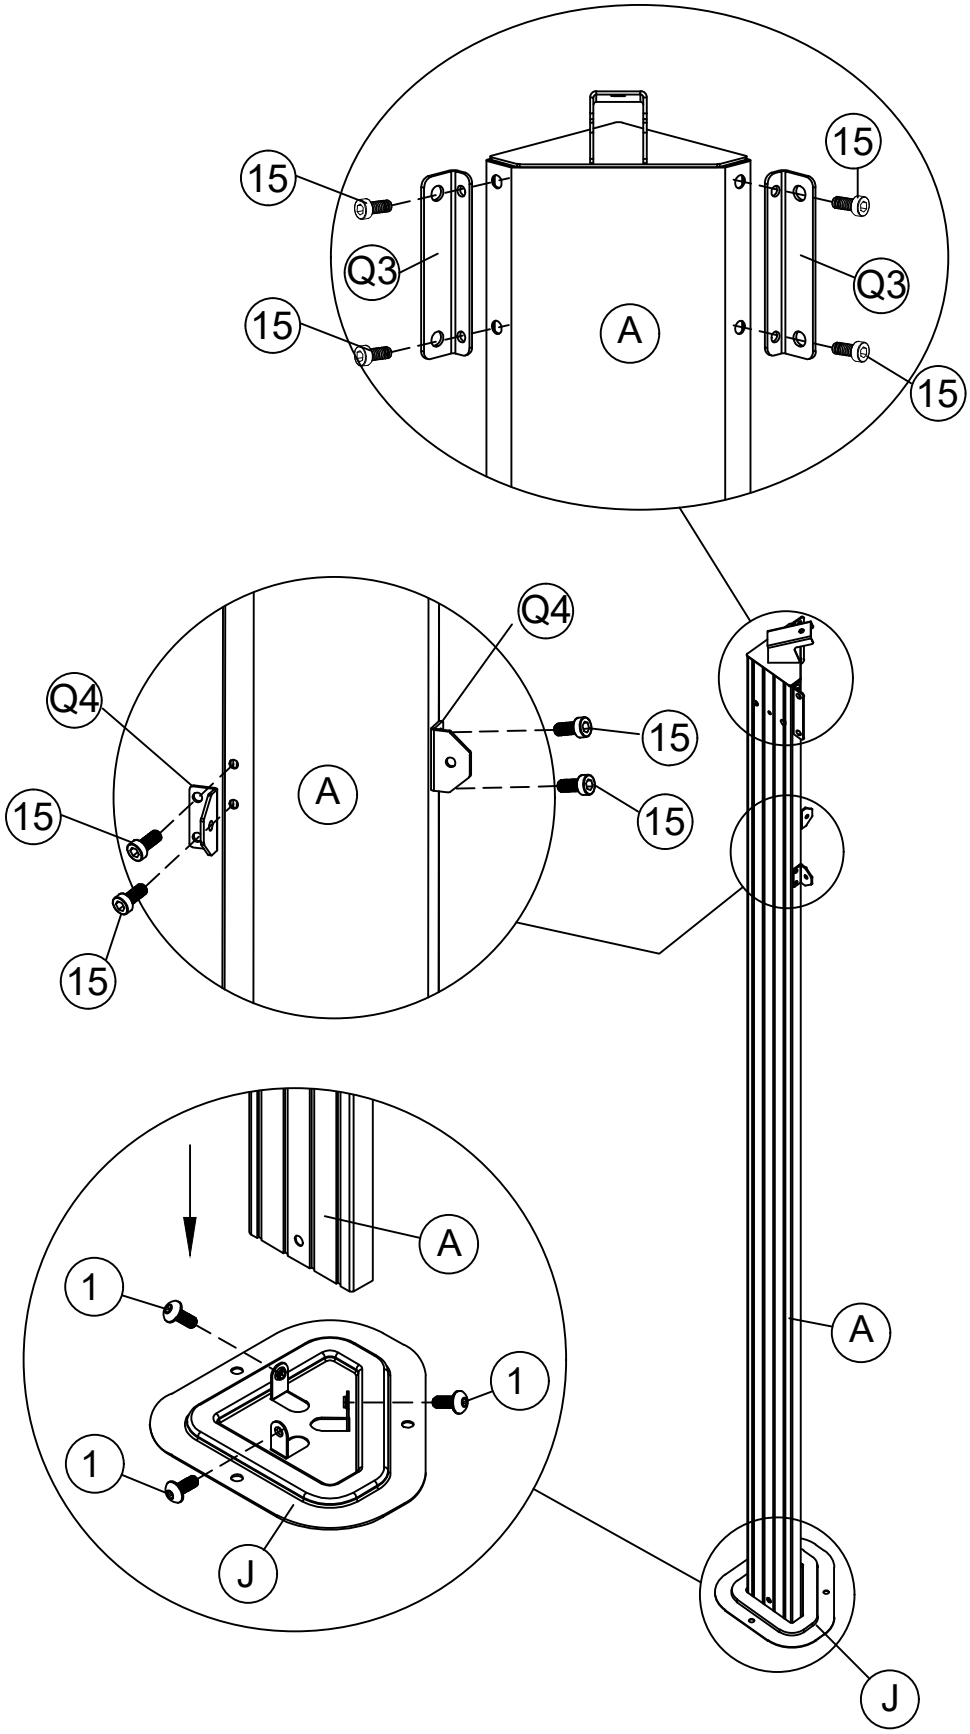

<1>




B1 2x




B2 2x



B3 2x



B4 2x




P 4x




M6x15

1 32x

<2>

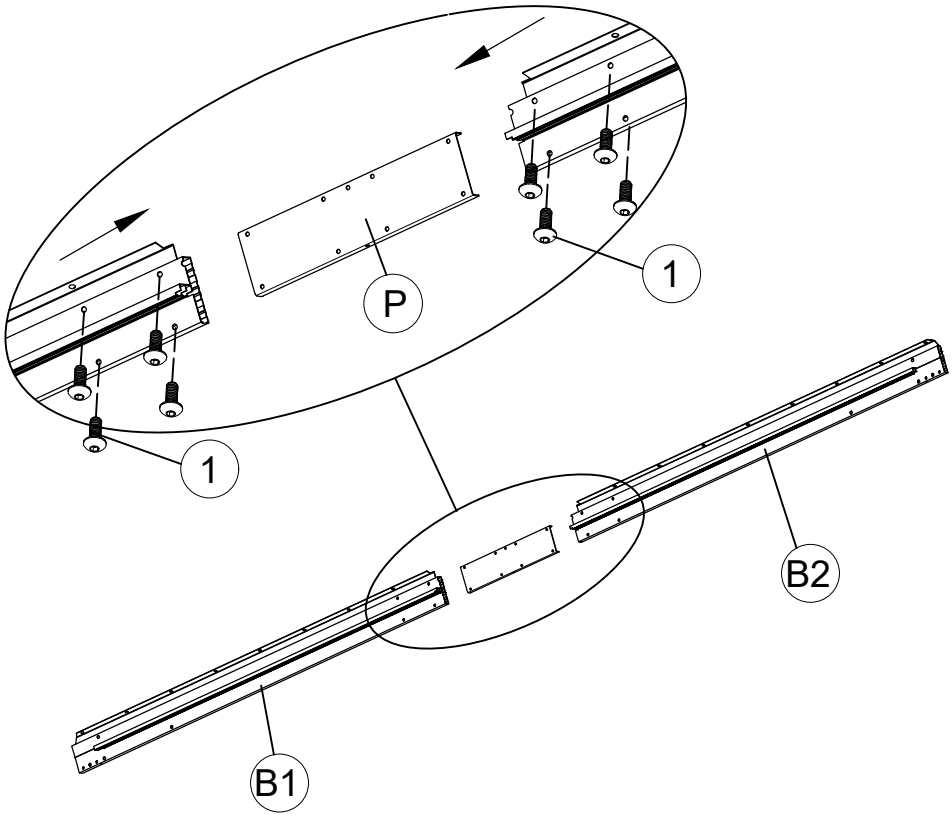

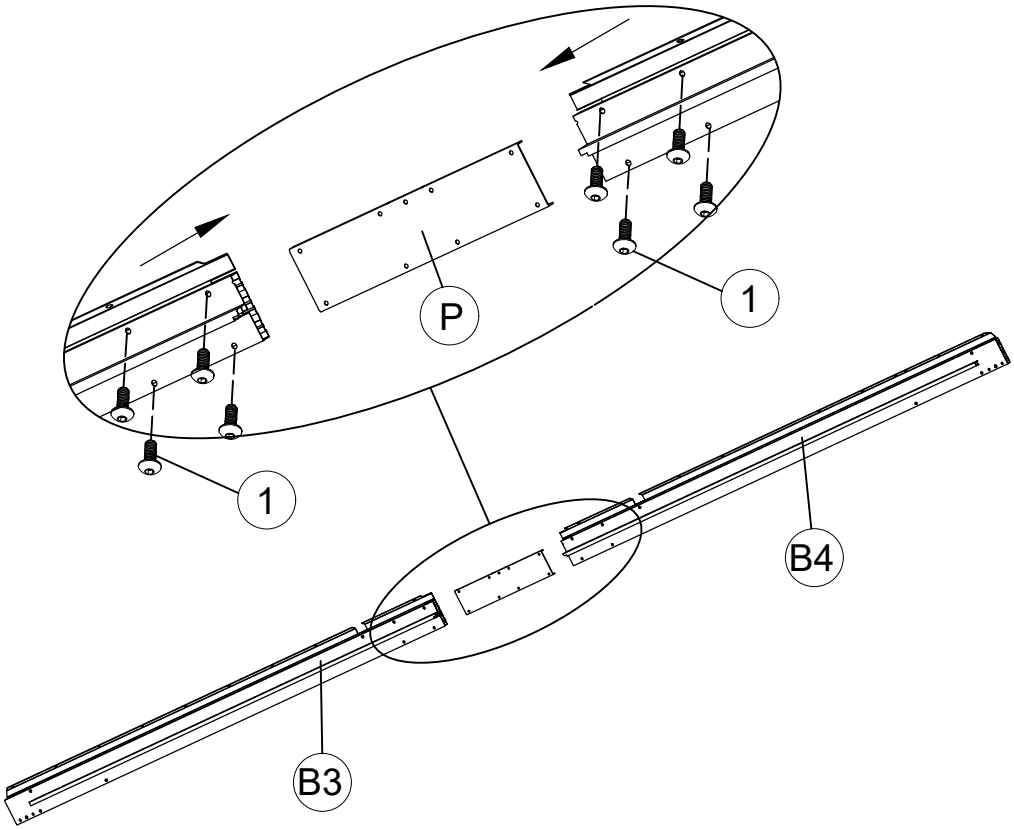




8 16x




M6x15


1 16x

<3>

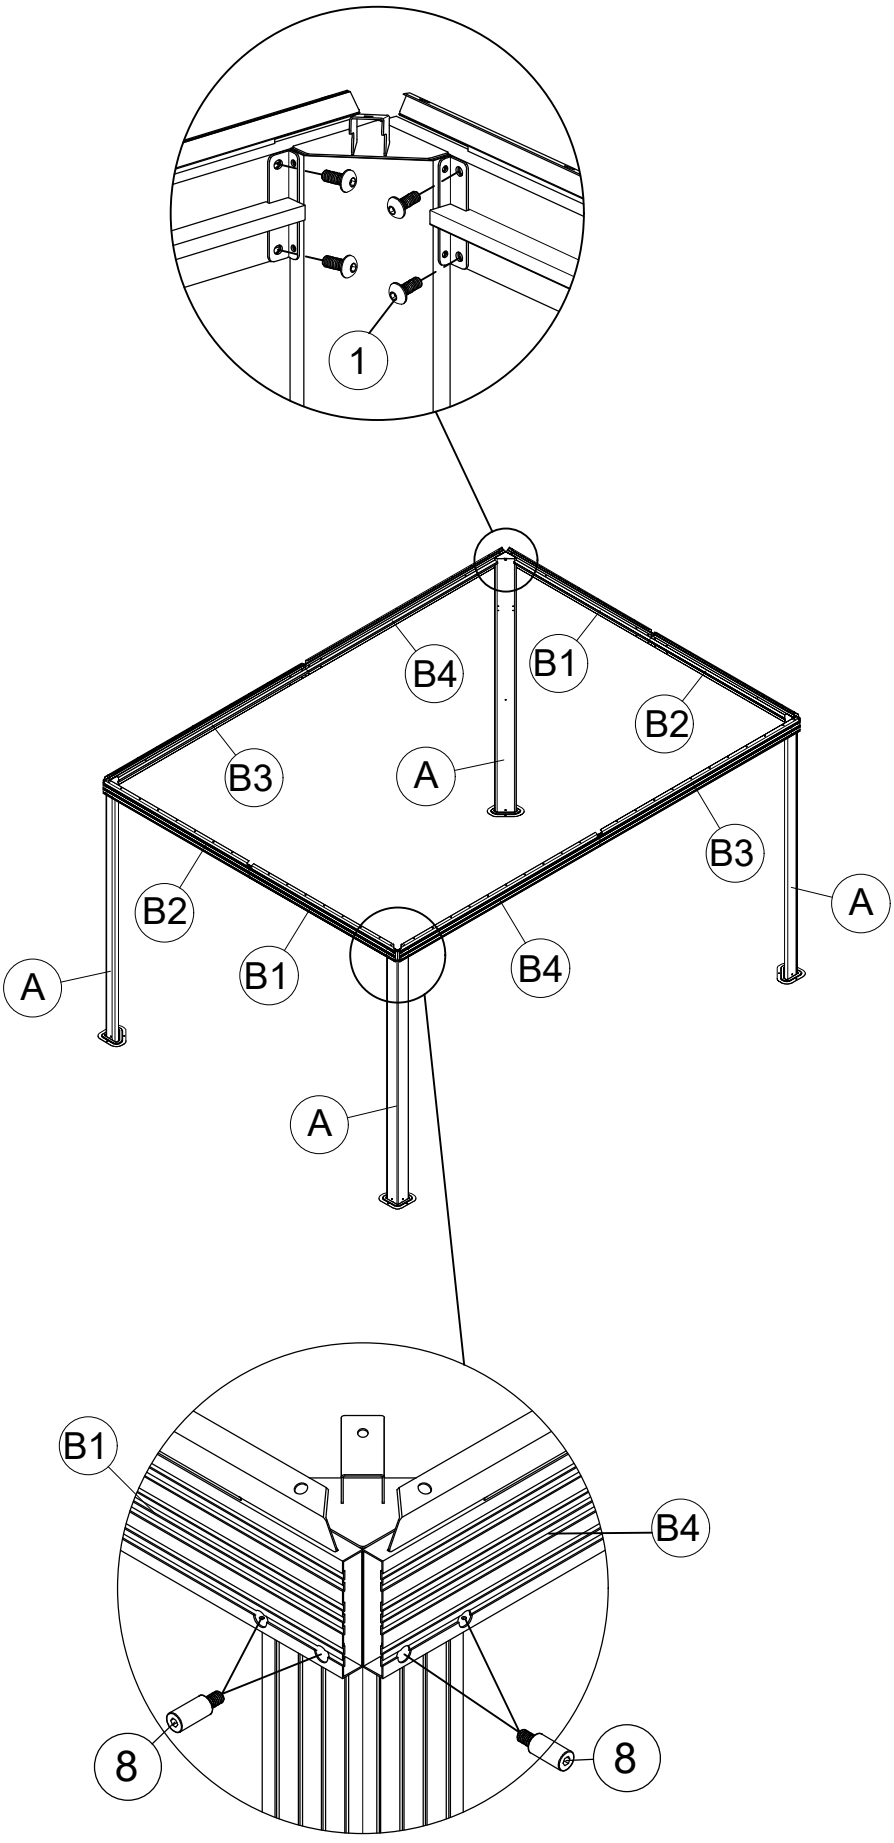



H1 4x



H 4x





M6x15

1 16x




10 12x

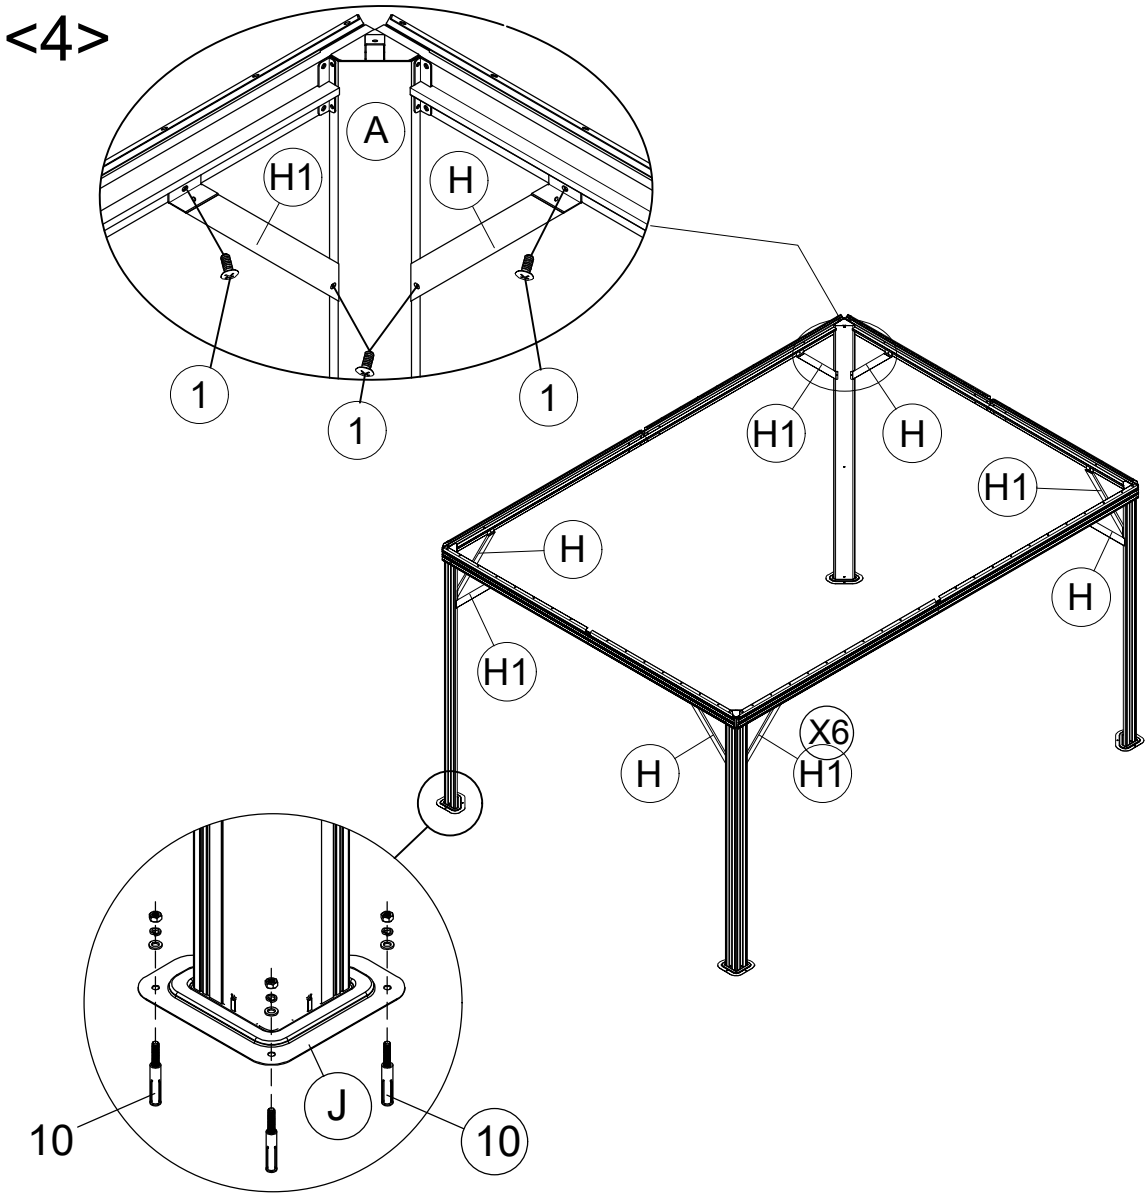


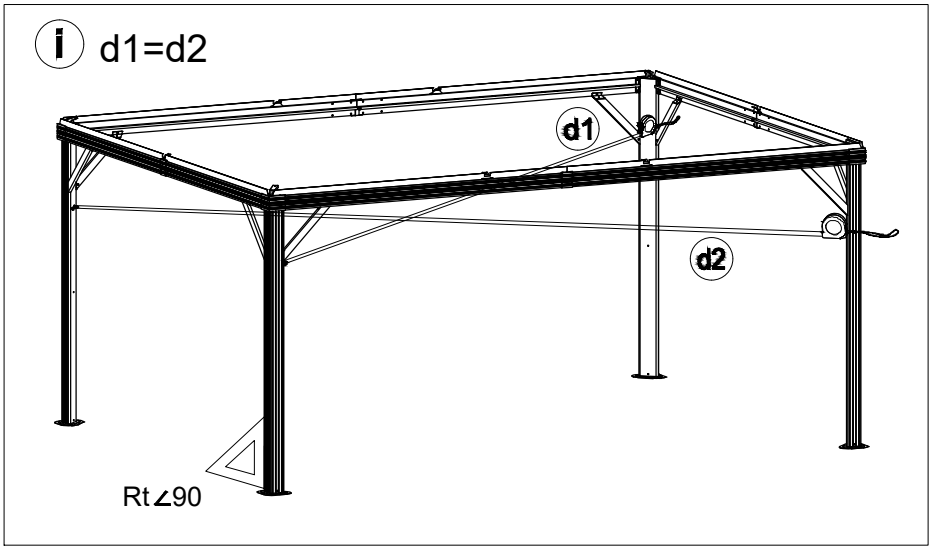

Tips: Please measure to make sure the length of d1 is equal to d2 before moving to next step to ensure a square frame and best results. Keep the beam at right angles to the post, the post at right angles to the ground, and keep the beam horizontal.



K 4x



K1 4x



U 120x



V 4x



M6x15

1 12x





ST4.8x12

4 8x

9

<5>

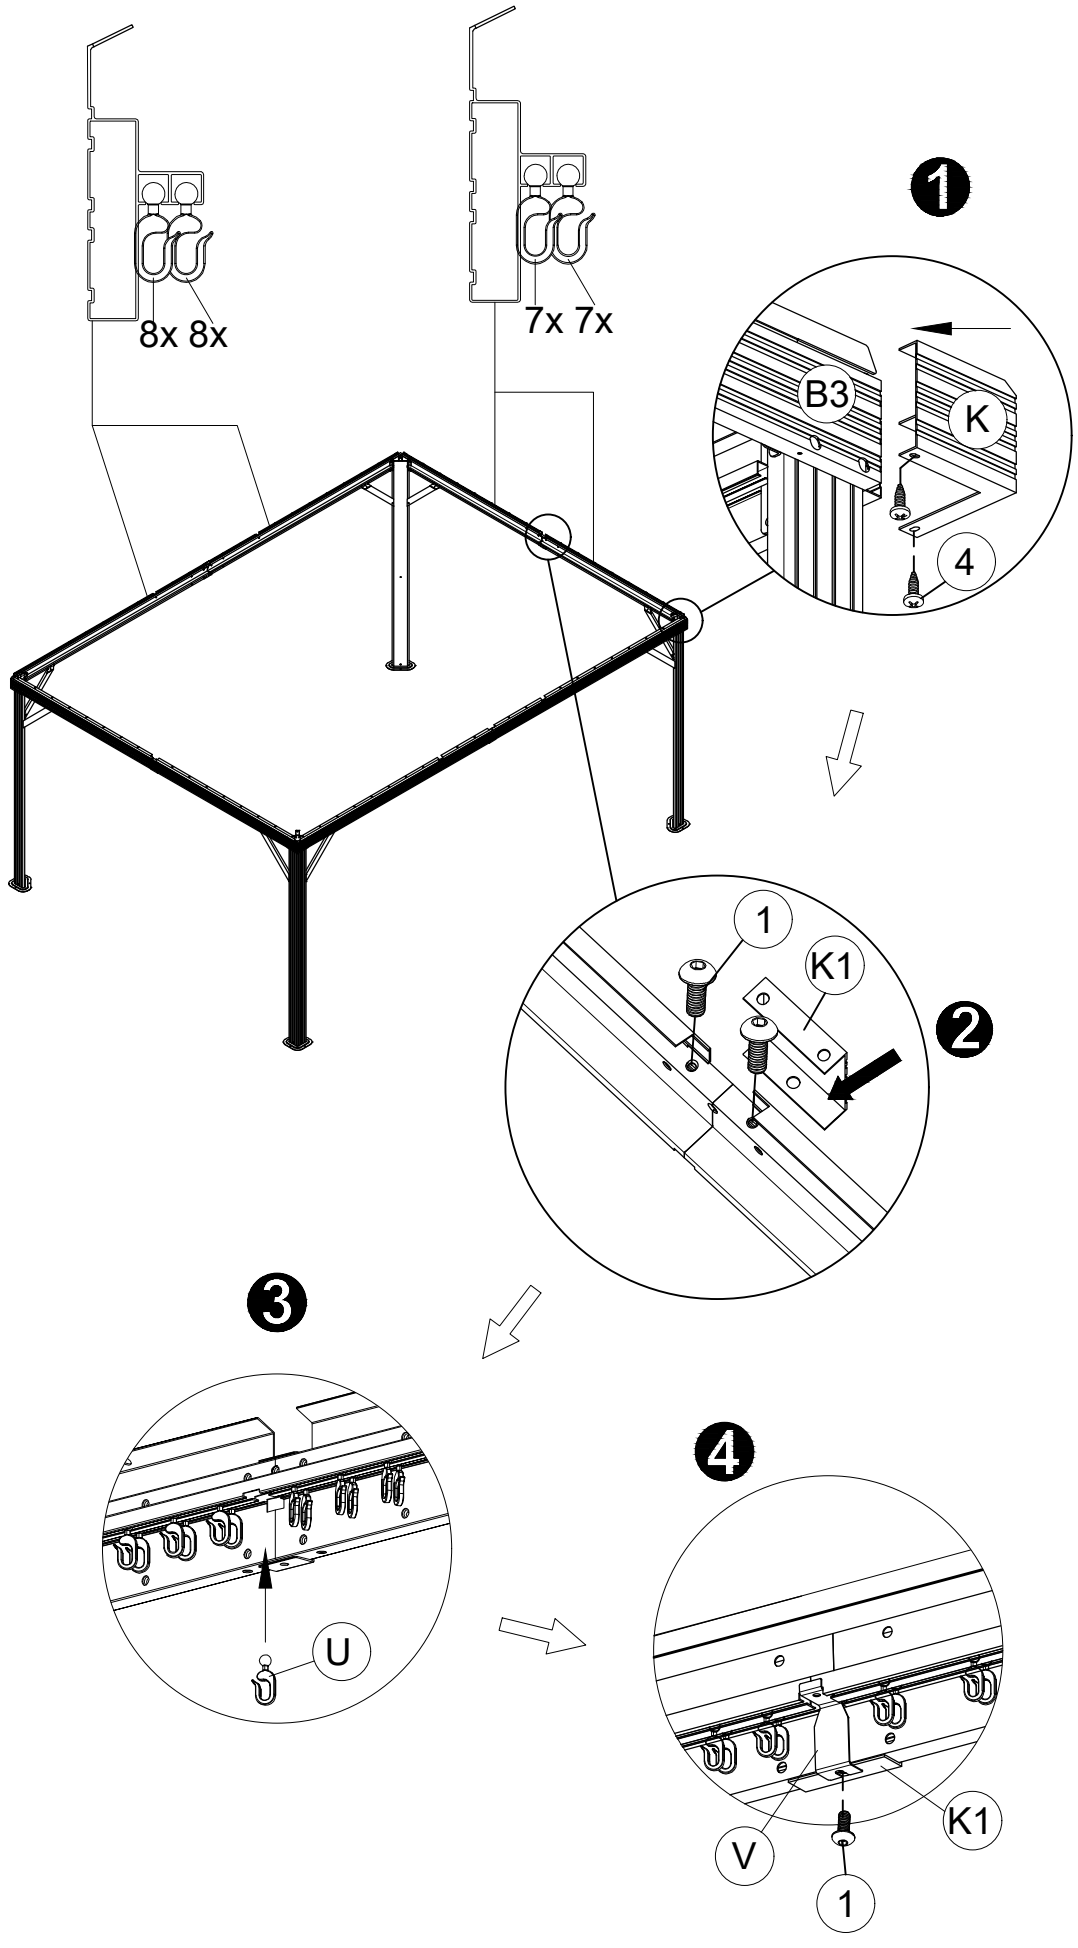




D 4x



E5 4x




L2 1x




M6x15

1 16x



11 1x

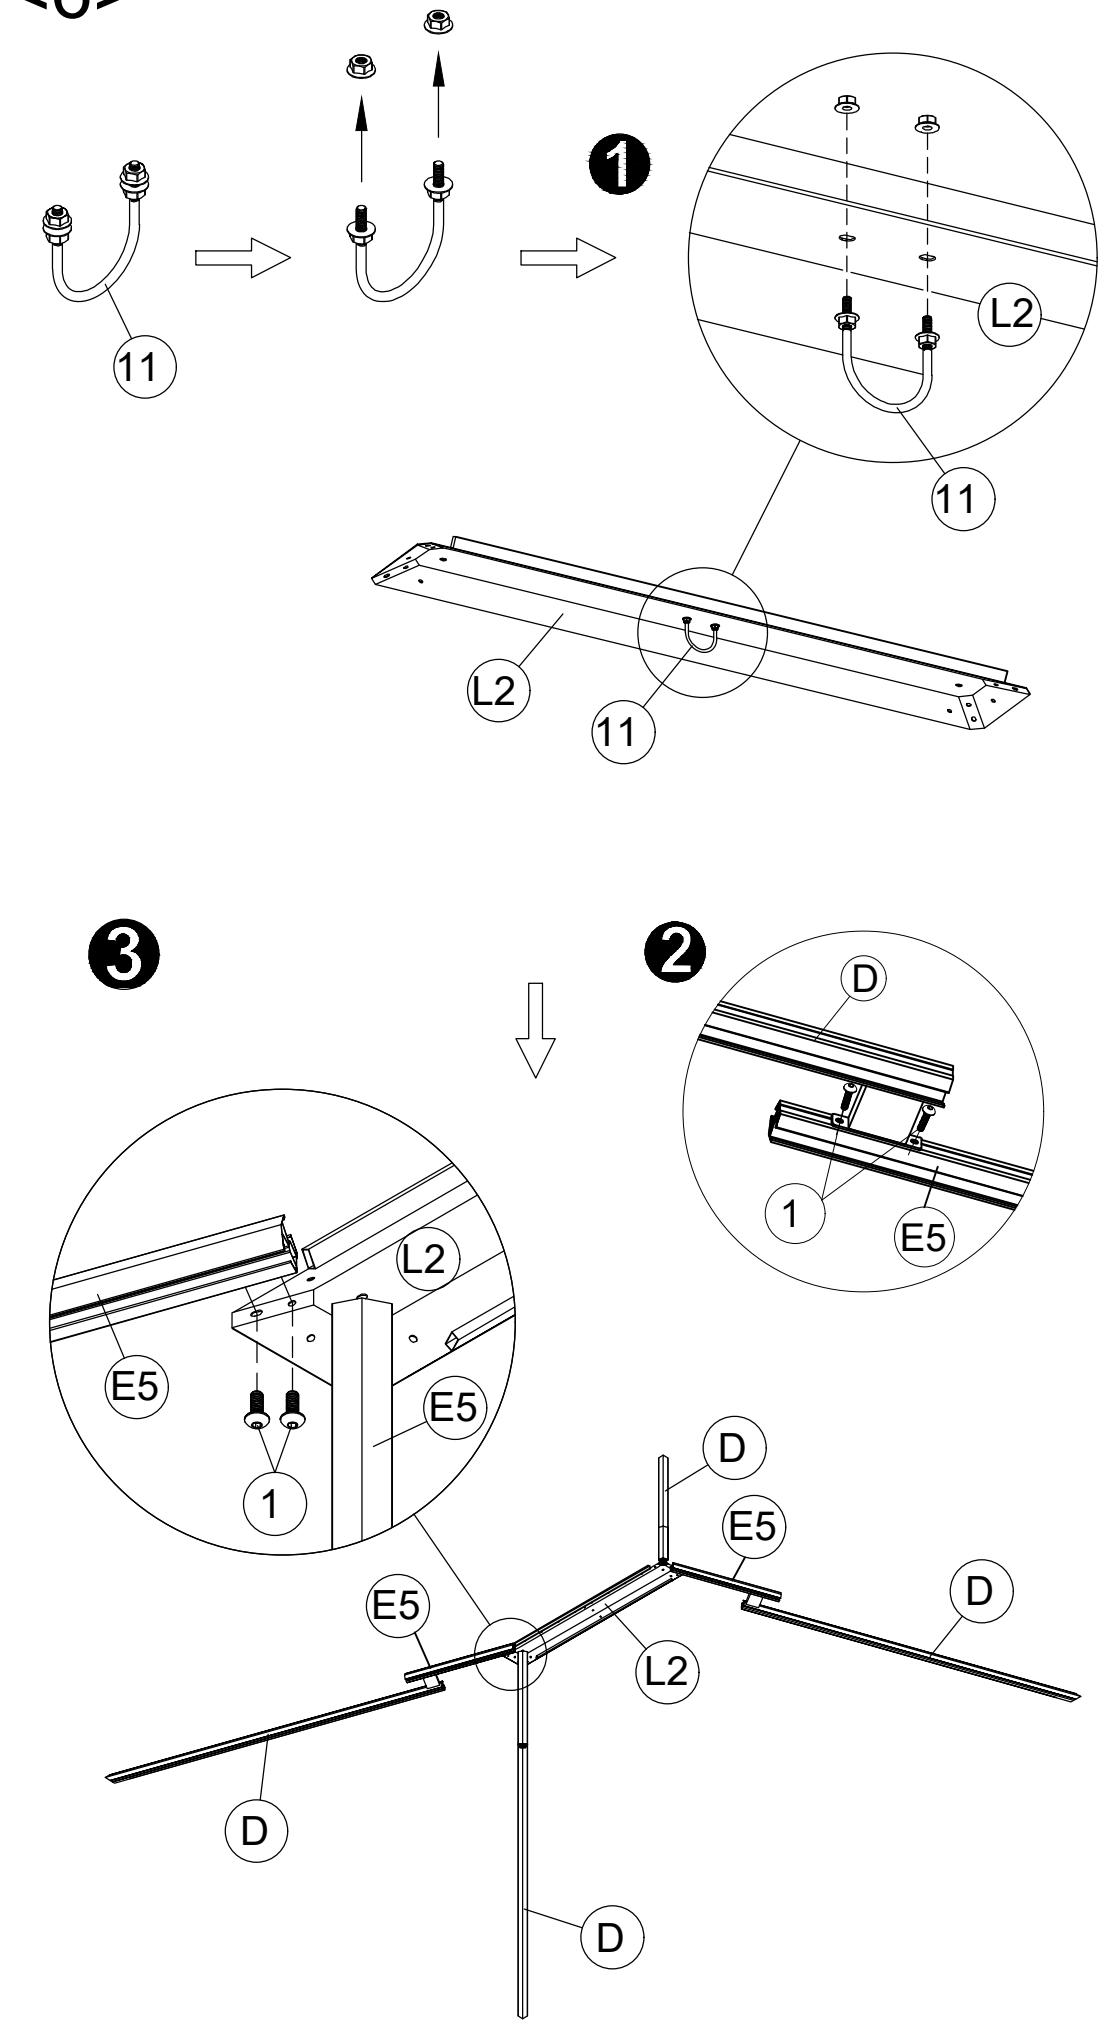





M6x15

1 4x


<7>

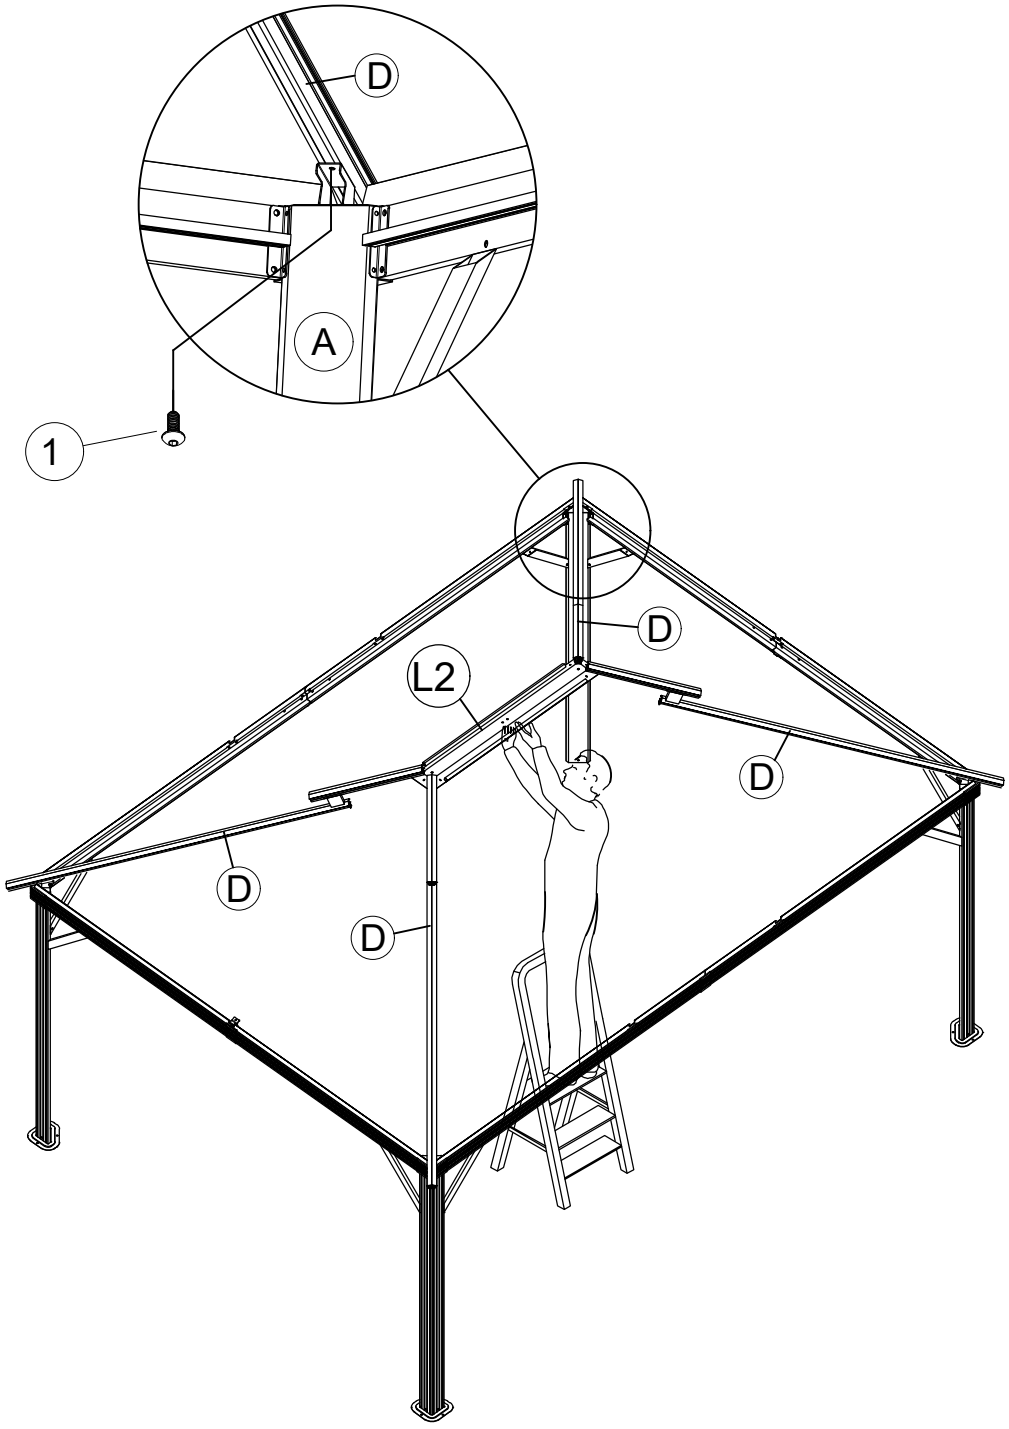

Note:
1. Let one person stand on the ladder to lift "L2" and hold and let others fasten the screws connecting both ends of "D".
2. Please do not let go of holding "L2" until all the "D" screws are installed.



D1 6x




Q1 6x



M6x15

1 24x

<8>

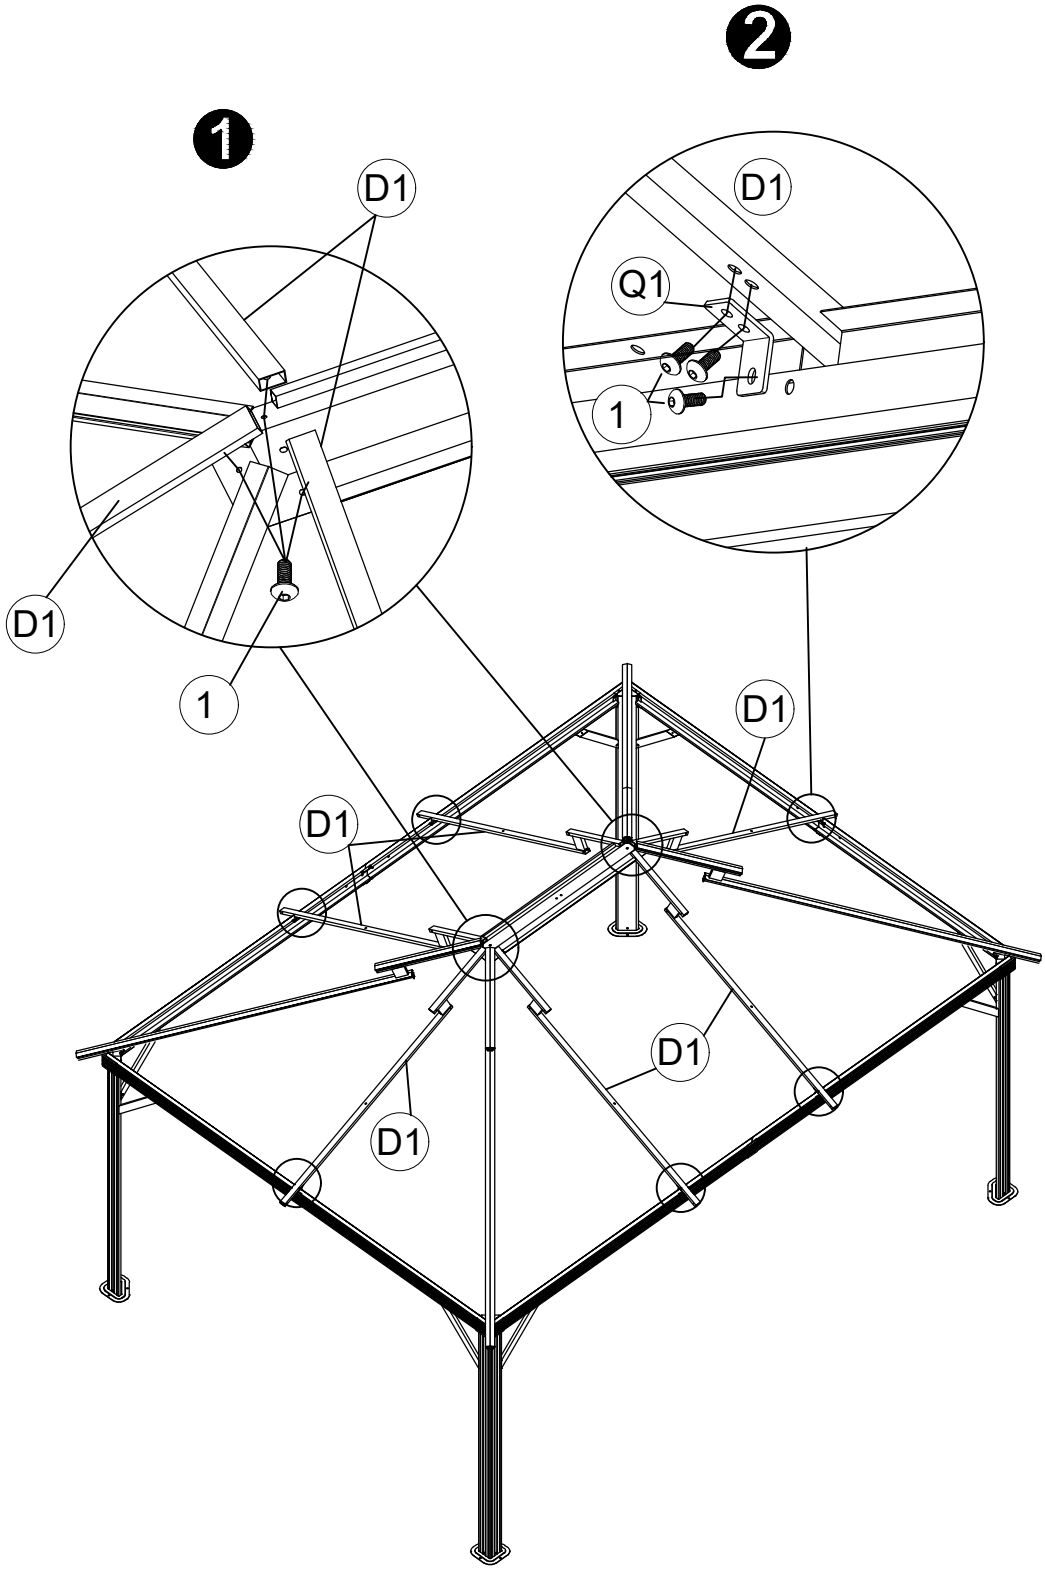



G1 2x



G2 2x




N 4x





M6x15


1 10x


<9>

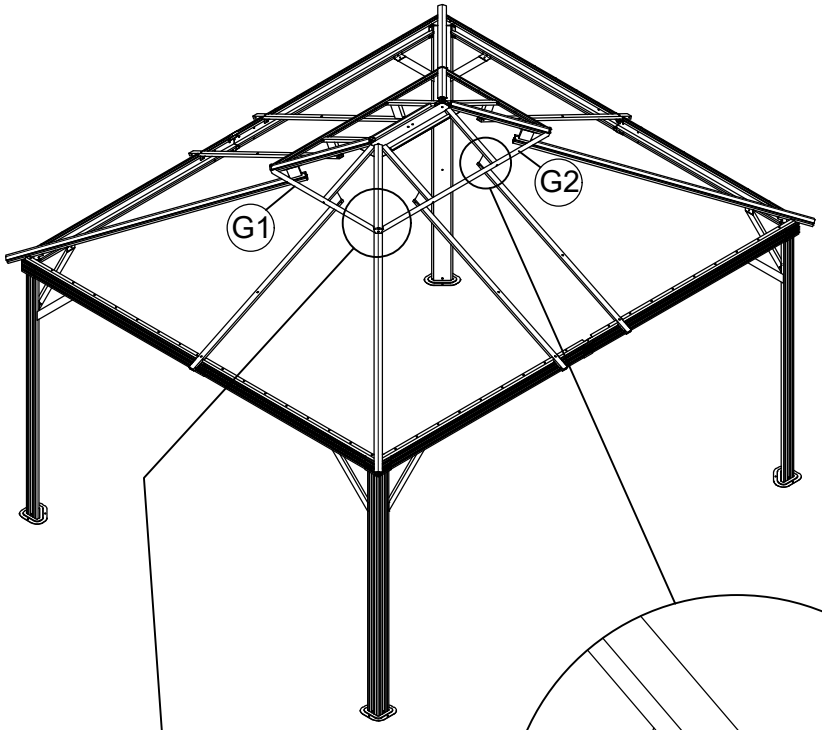

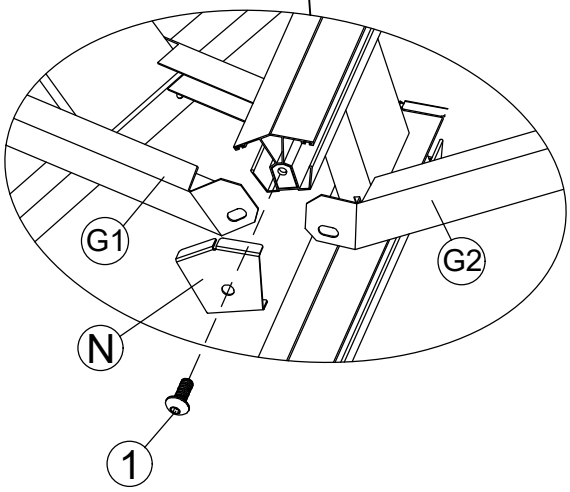

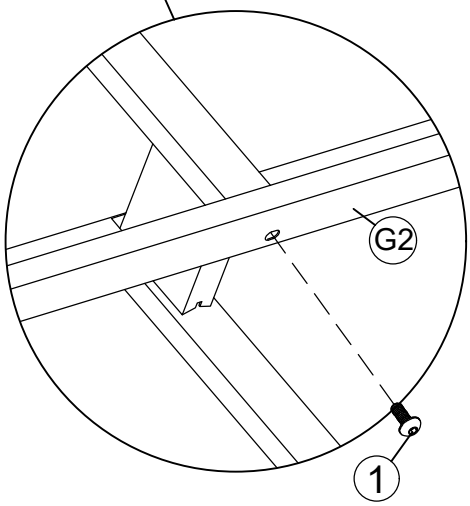

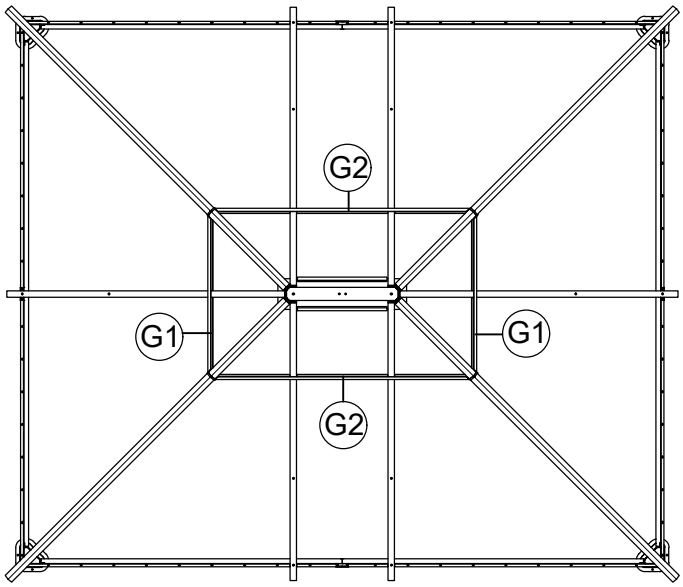



S1 2x


S2 2x




X1 2x



X2 2x



X3 2x




X4 2x




X5 2x




X6 2x




Z 32x





Z1 4x




Z2 4x

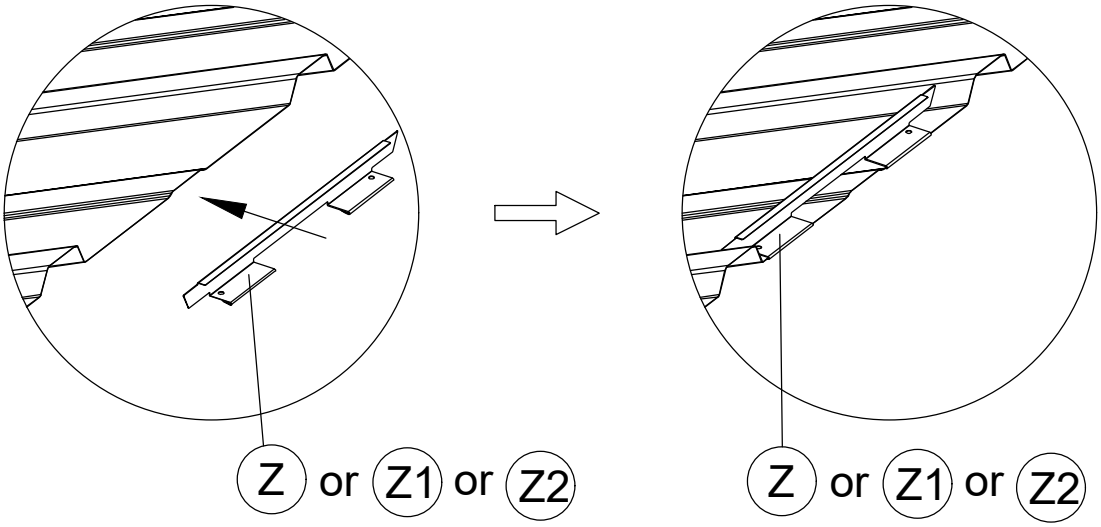


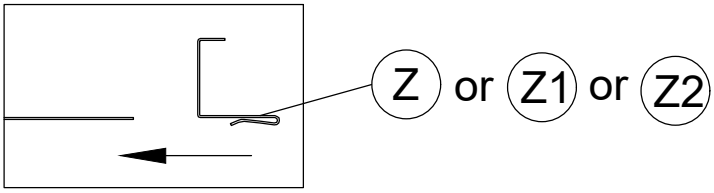


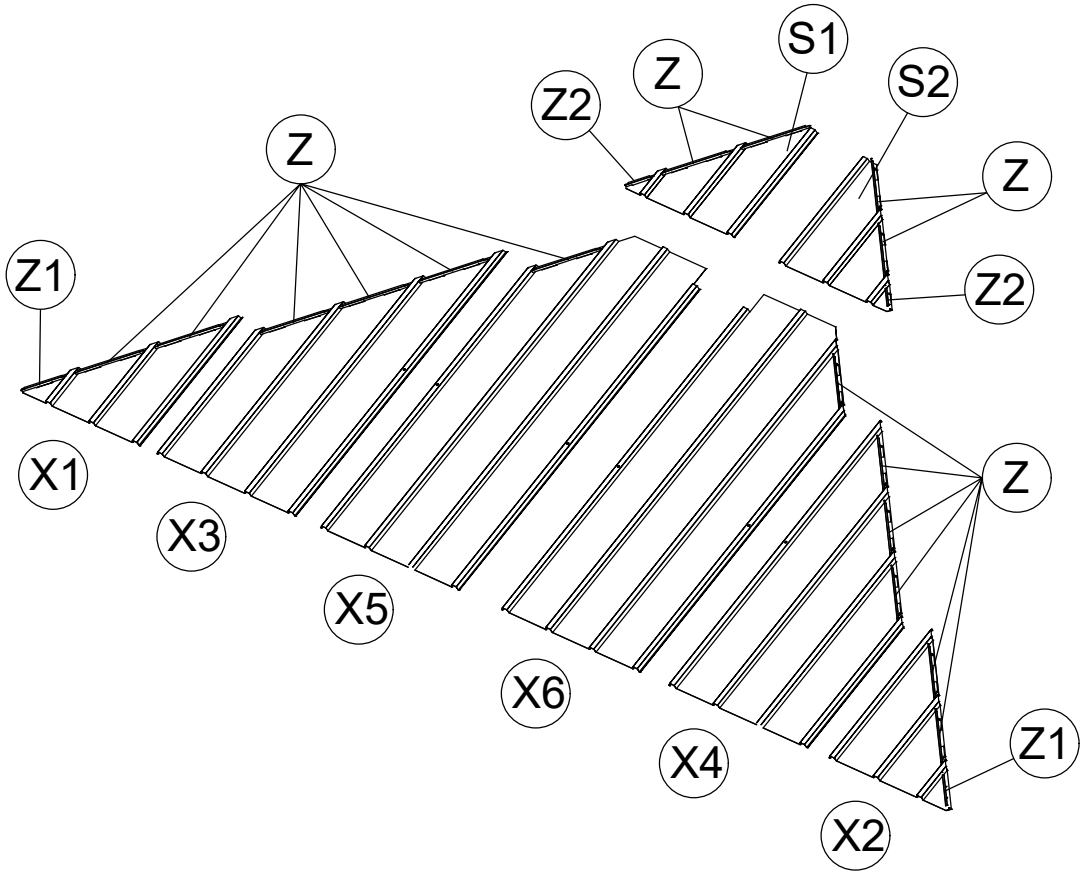



<11>

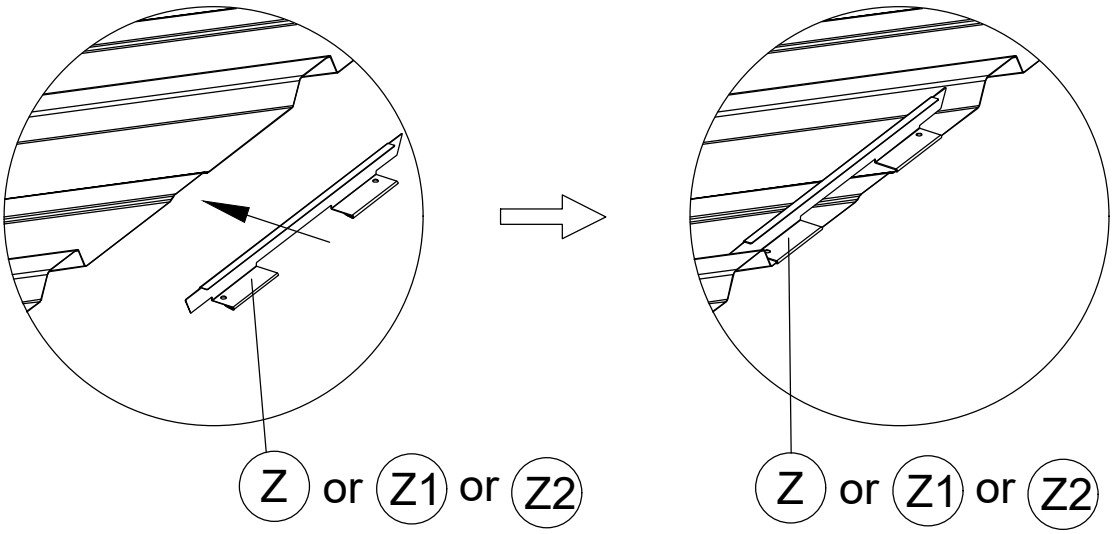

Z or Z1 or Z2
Z or Z1 or Z2

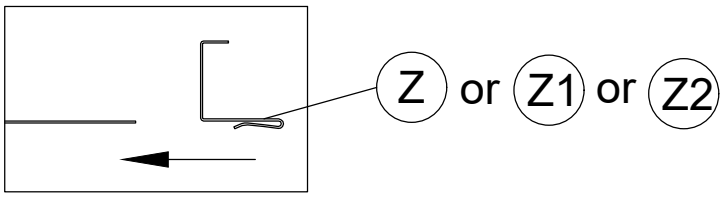

Z or Z1 or Z2

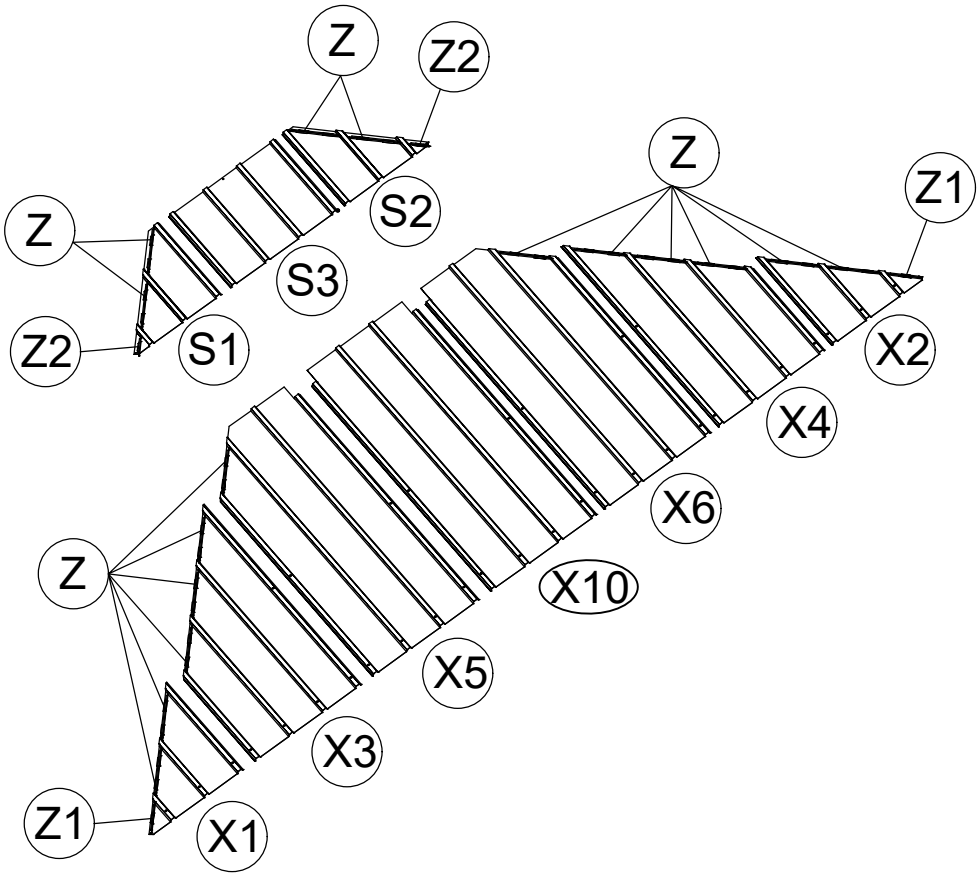

Z
Z2
S2
Z
S3
Z2
S1
Z
Z1
X2
X4
X6
X10
X5
X3
Z
Z1
X1



S1 2x
S2 2x



S3 2x



X1 2x
X2 2x



X3 2x
X4 2x


X5 2x
X6 2x



X10 2x



Z 32x


Z1 4x



Z2 4x


<12>

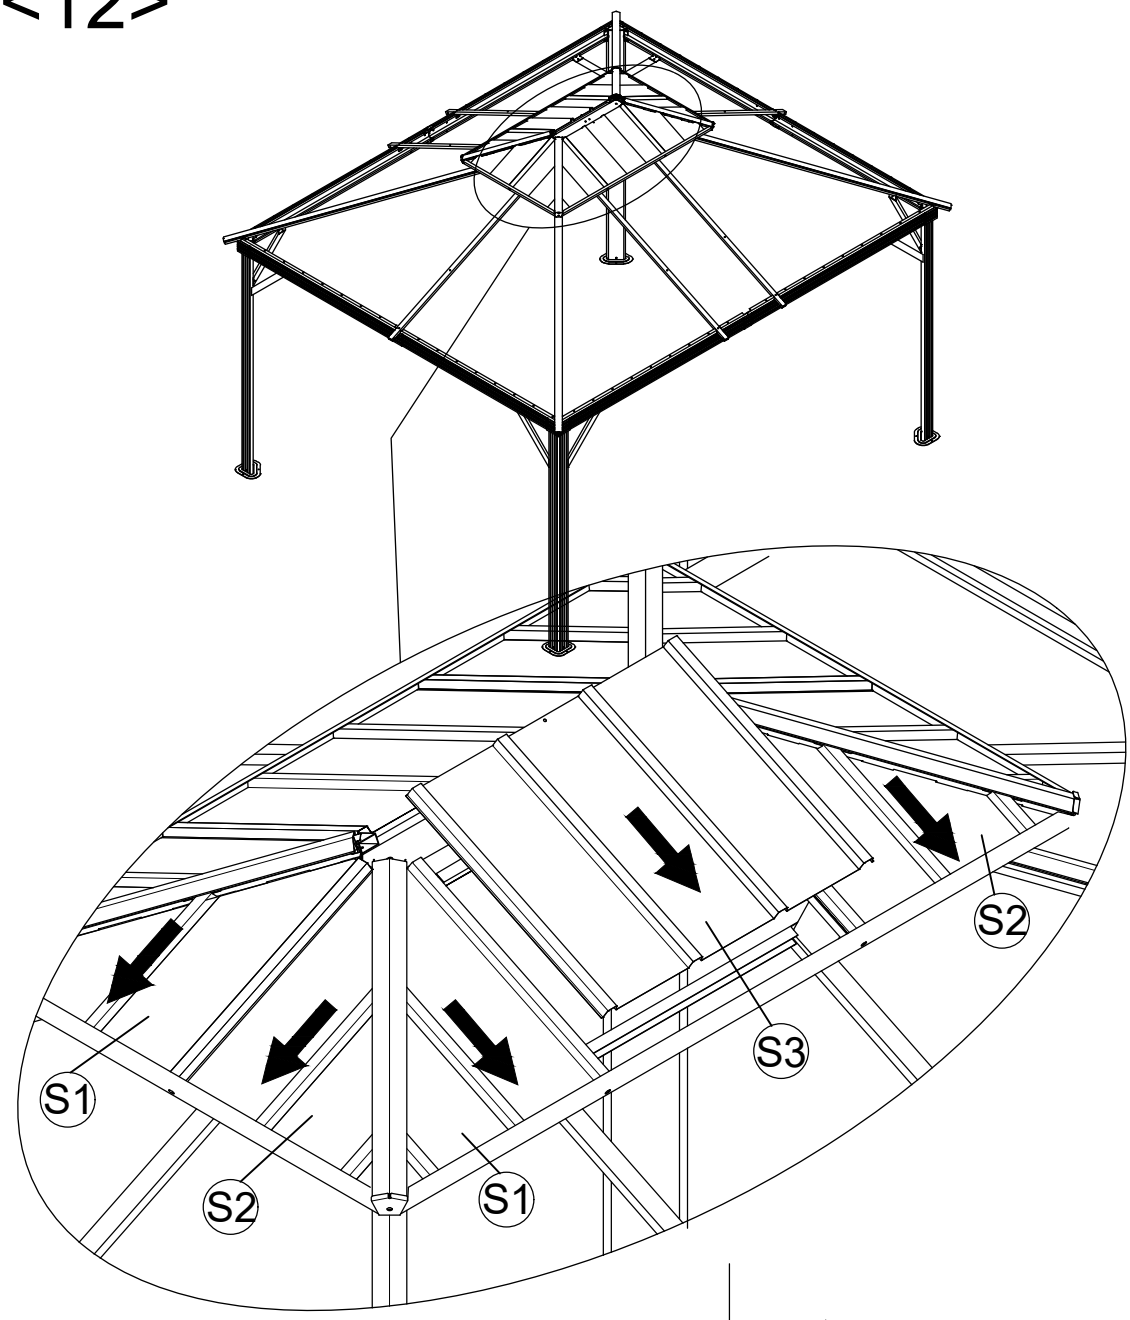

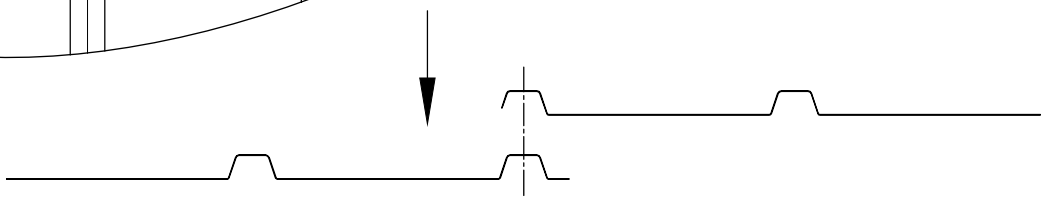


When installing the Roof plates (S2) onto short side, pls detach the right end of Roof Rib(G1) first. And then install the right end of Roof Rib (G1) again after S2 is installed.

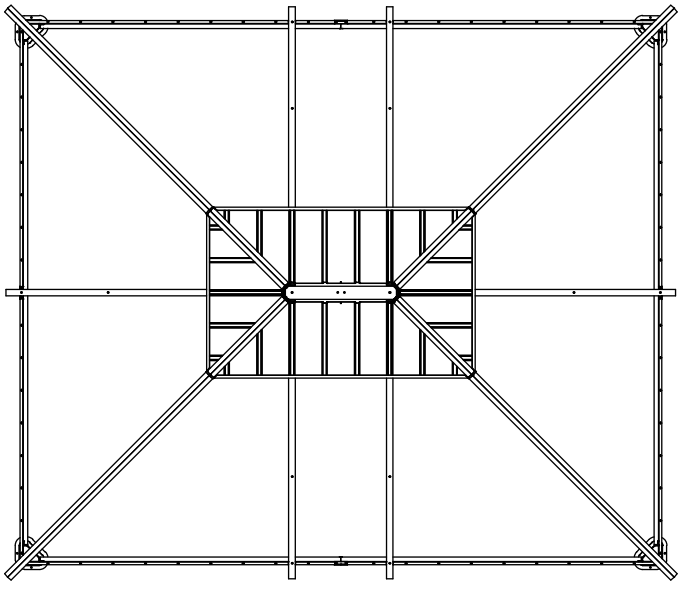




M2 1x



5 2x

<13>

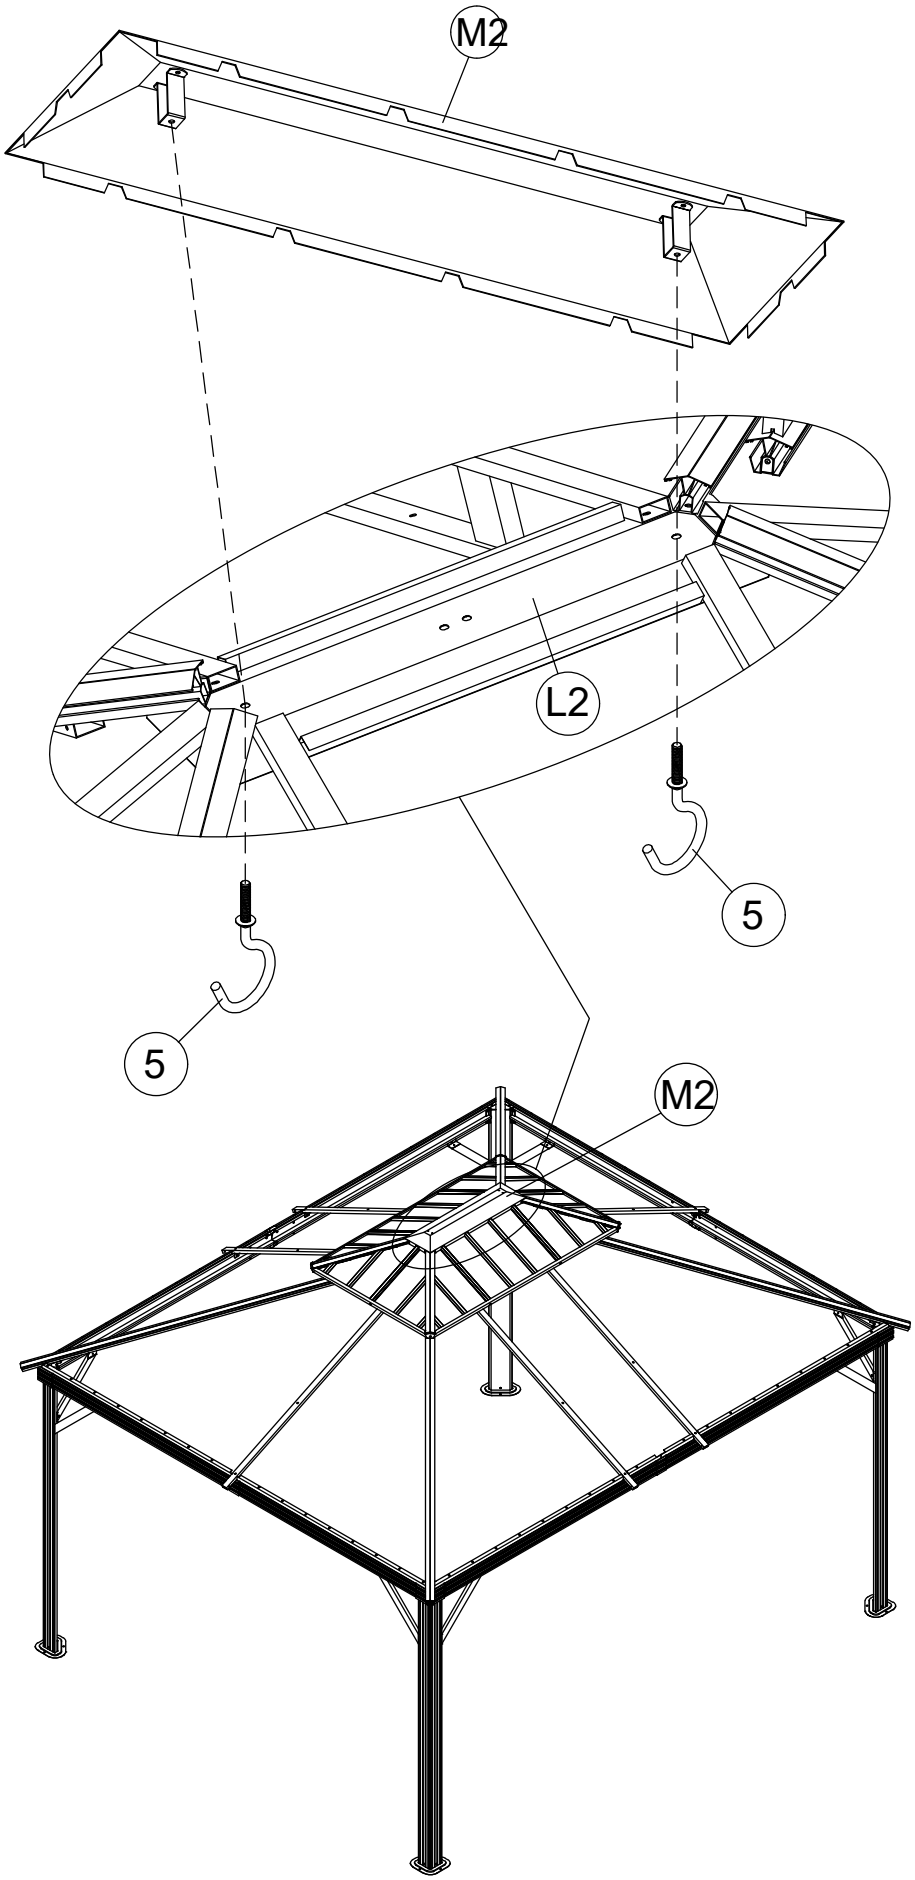

<14>


F1 4x


F2 4x

F3 2x

M6x15

1 10x

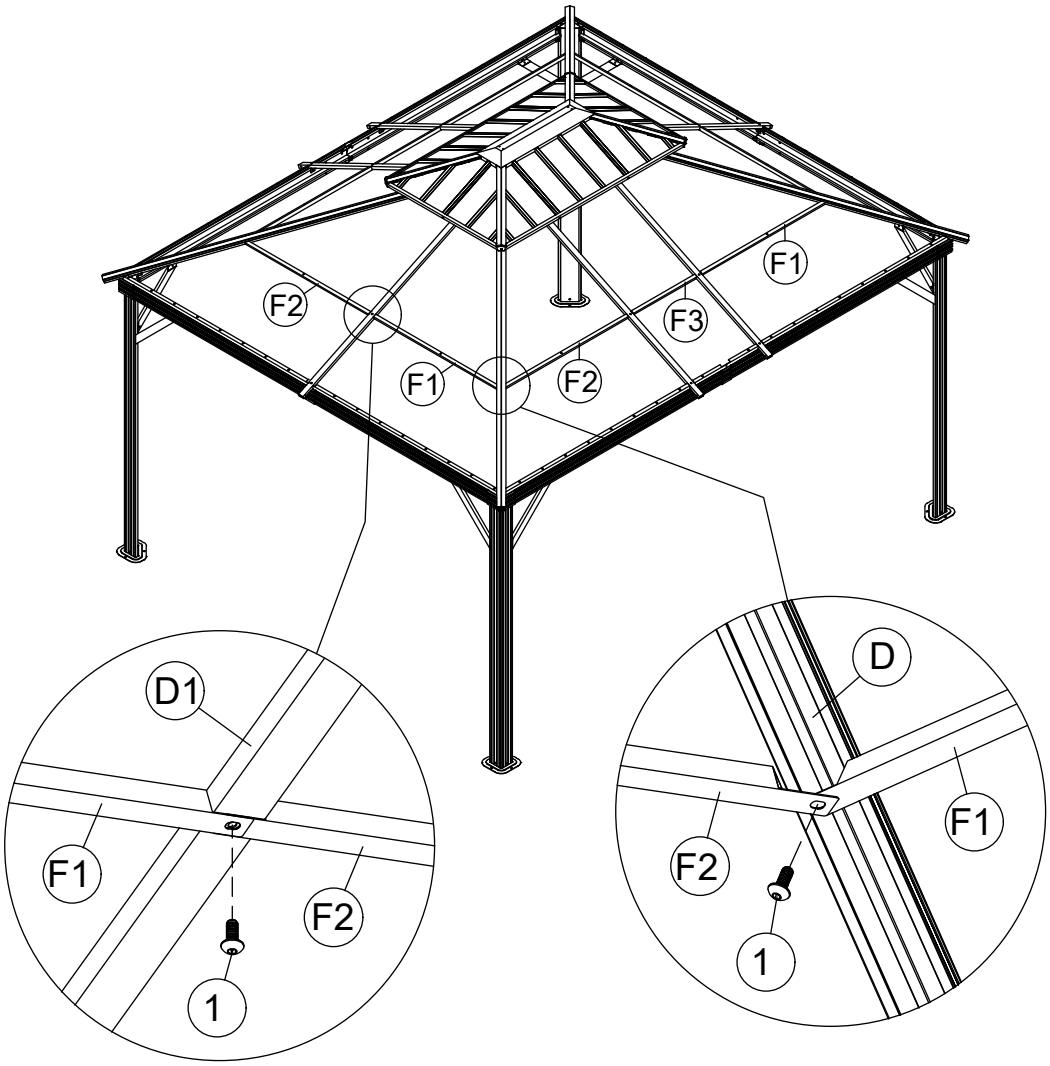

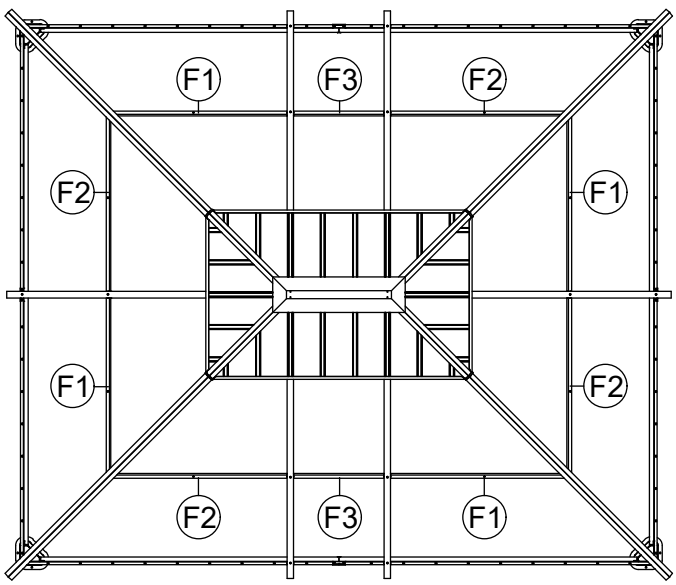




C1 4x



C2 4x



C3 2x



N 4x




N1 6x





M6x15


1 10x

<15>

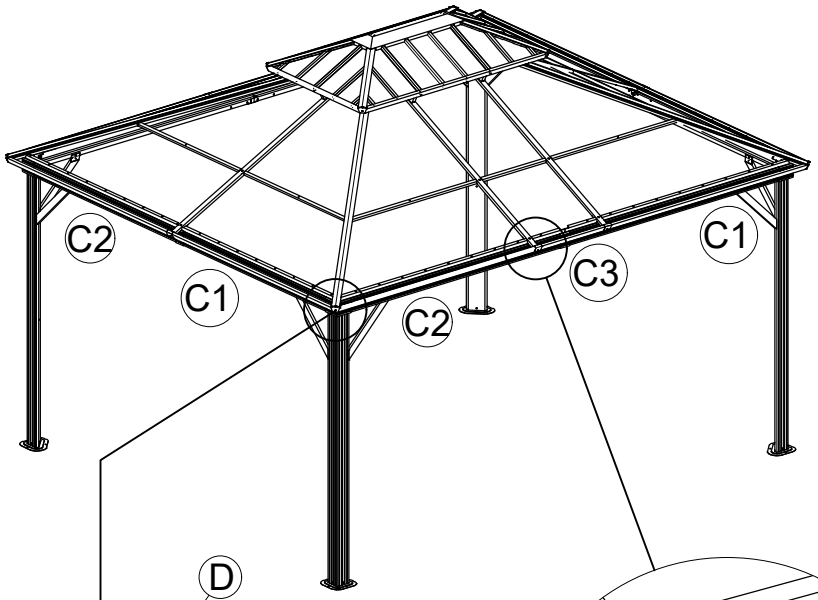


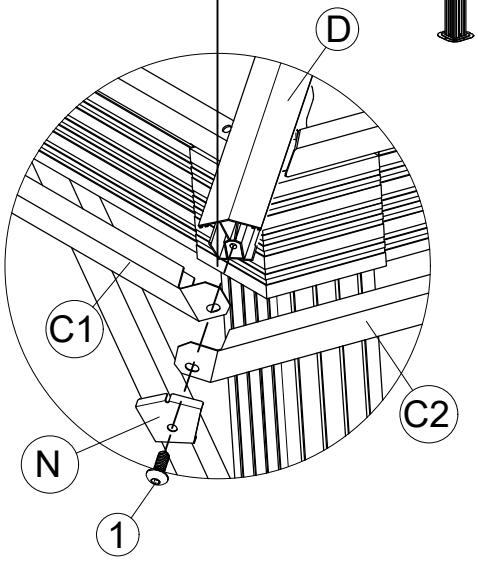

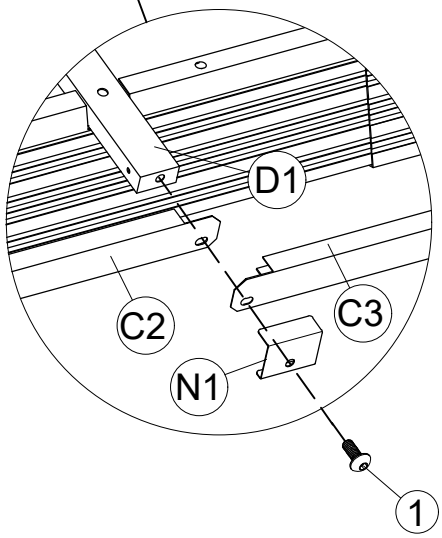


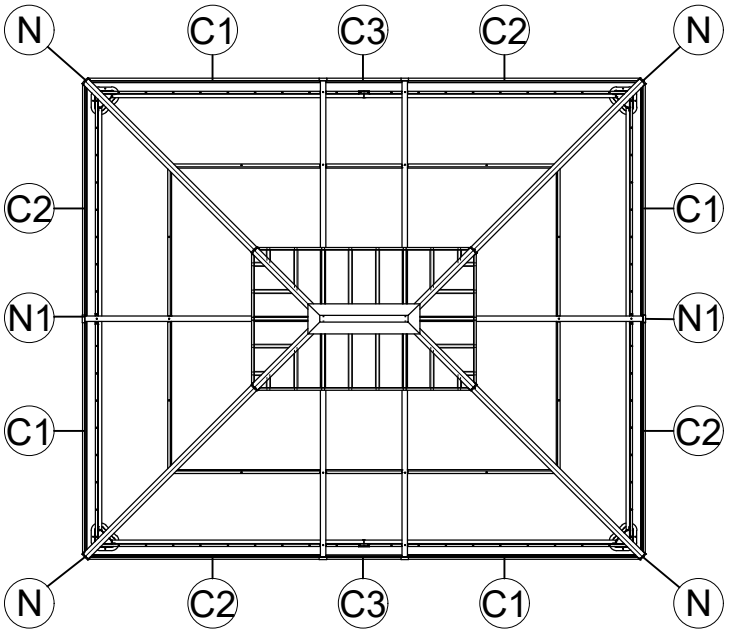


<16>

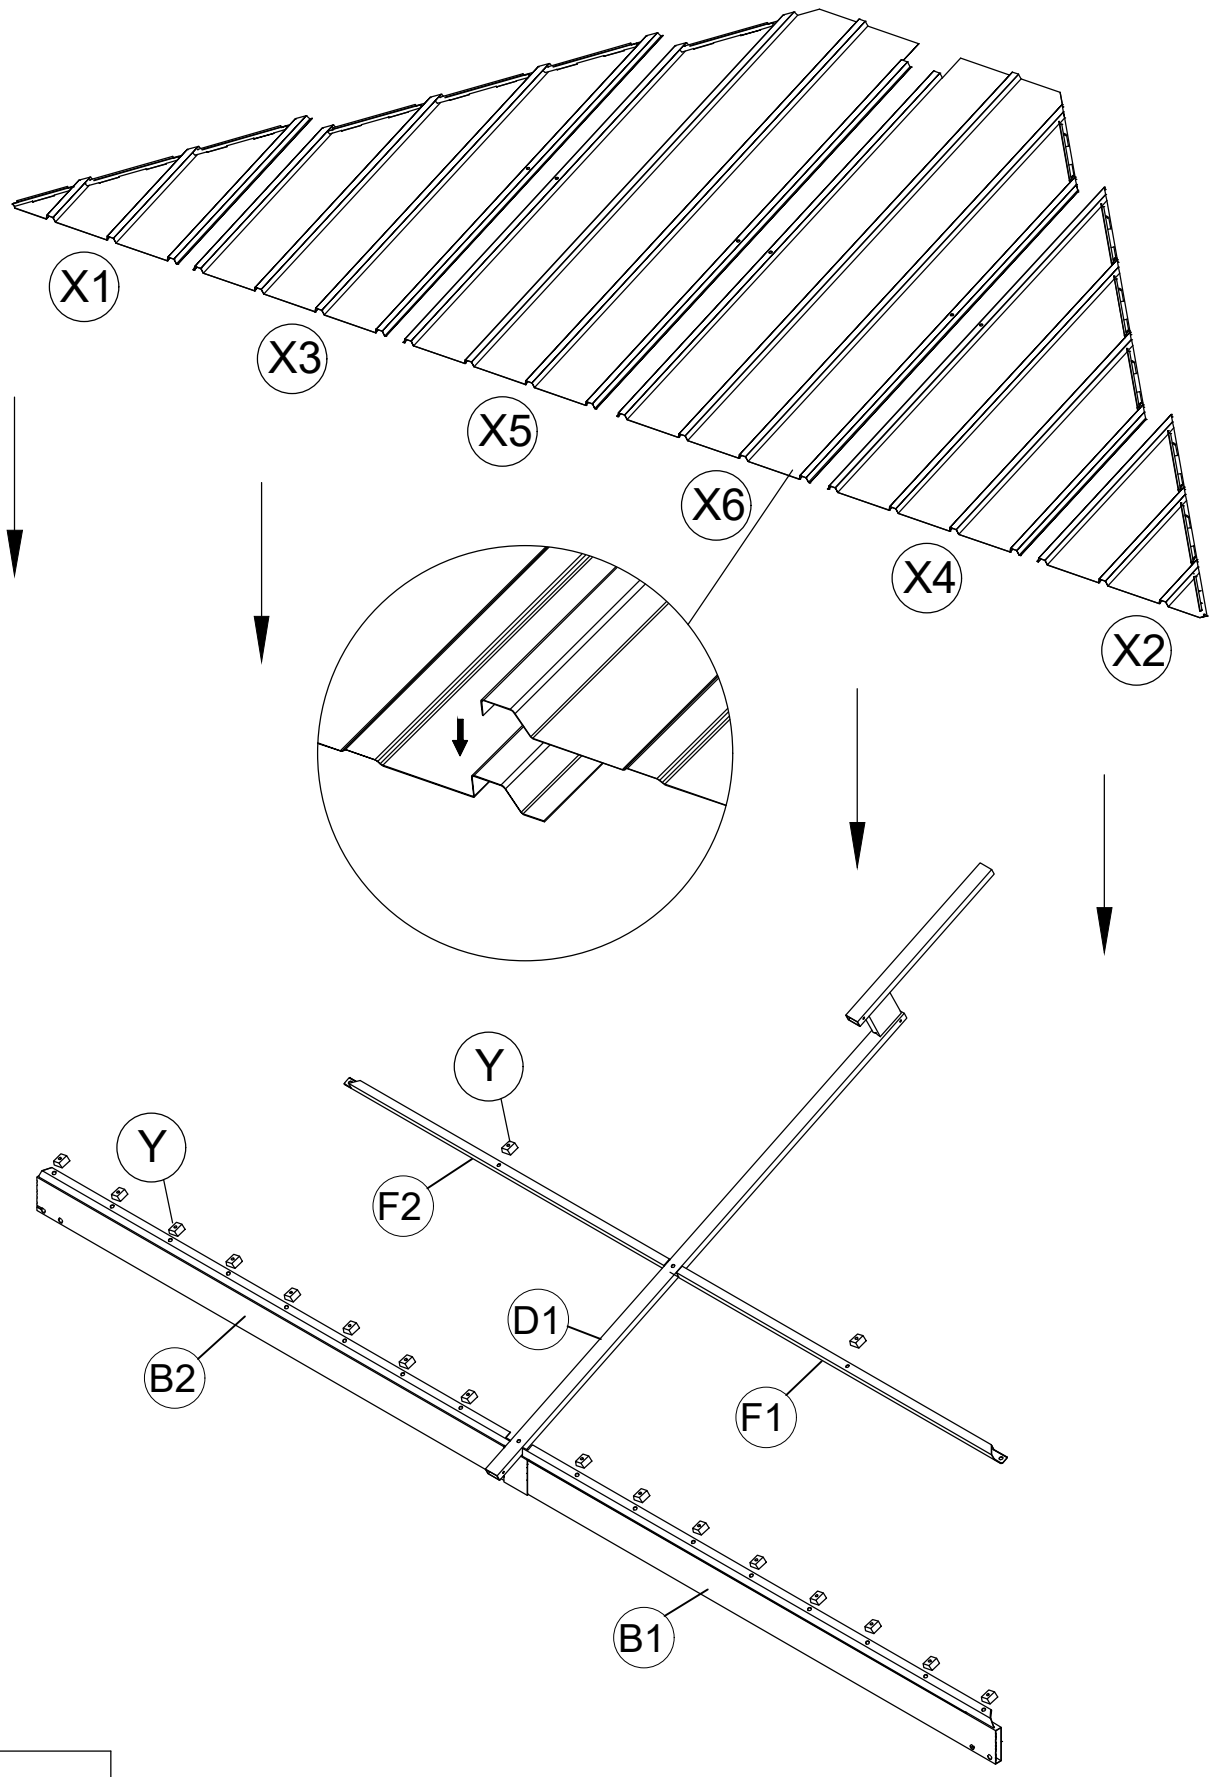



<17>

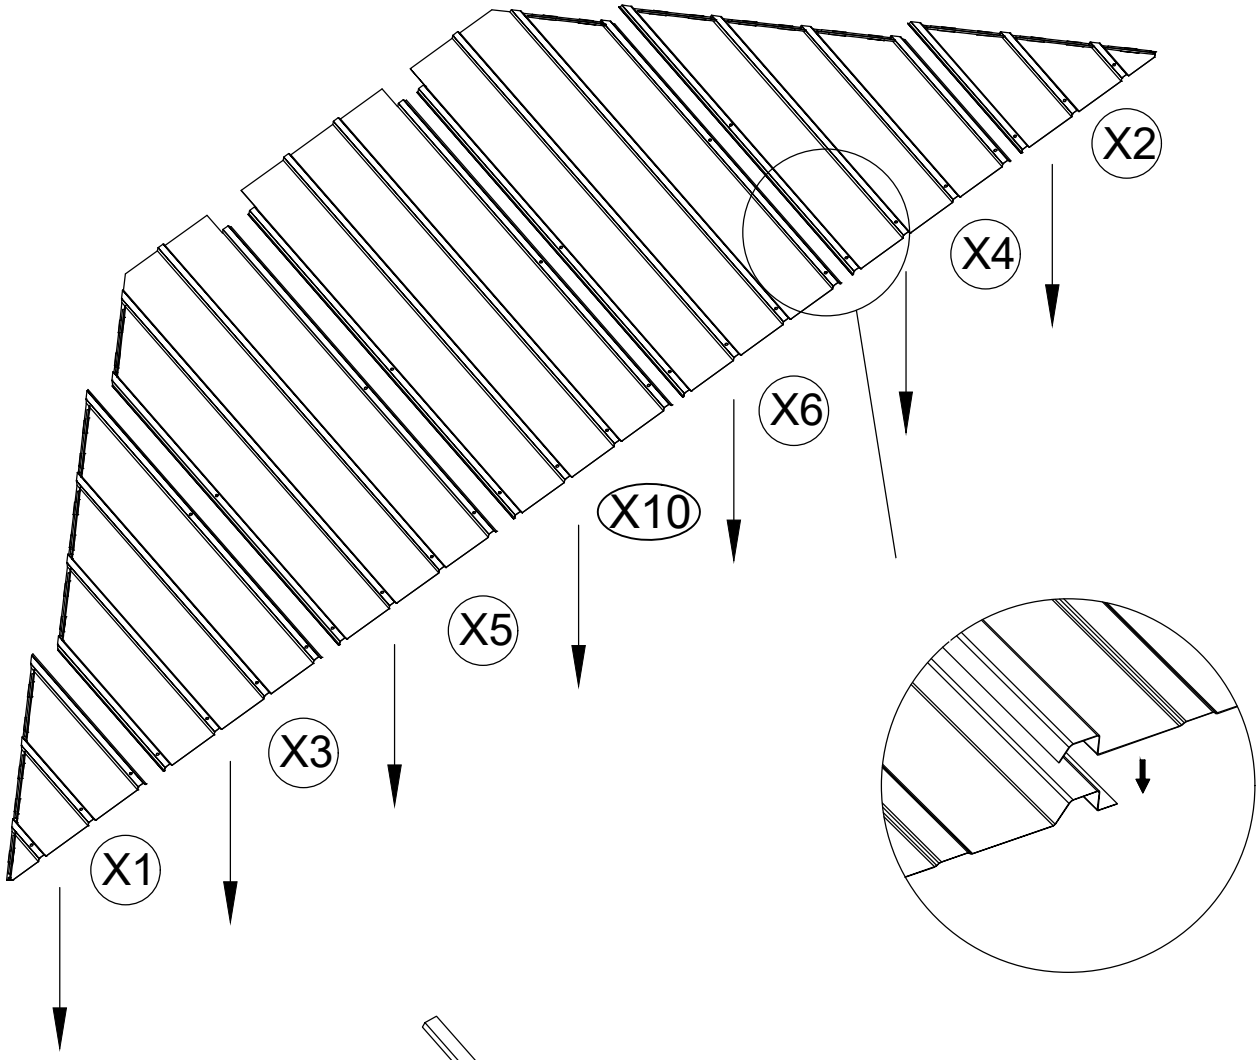


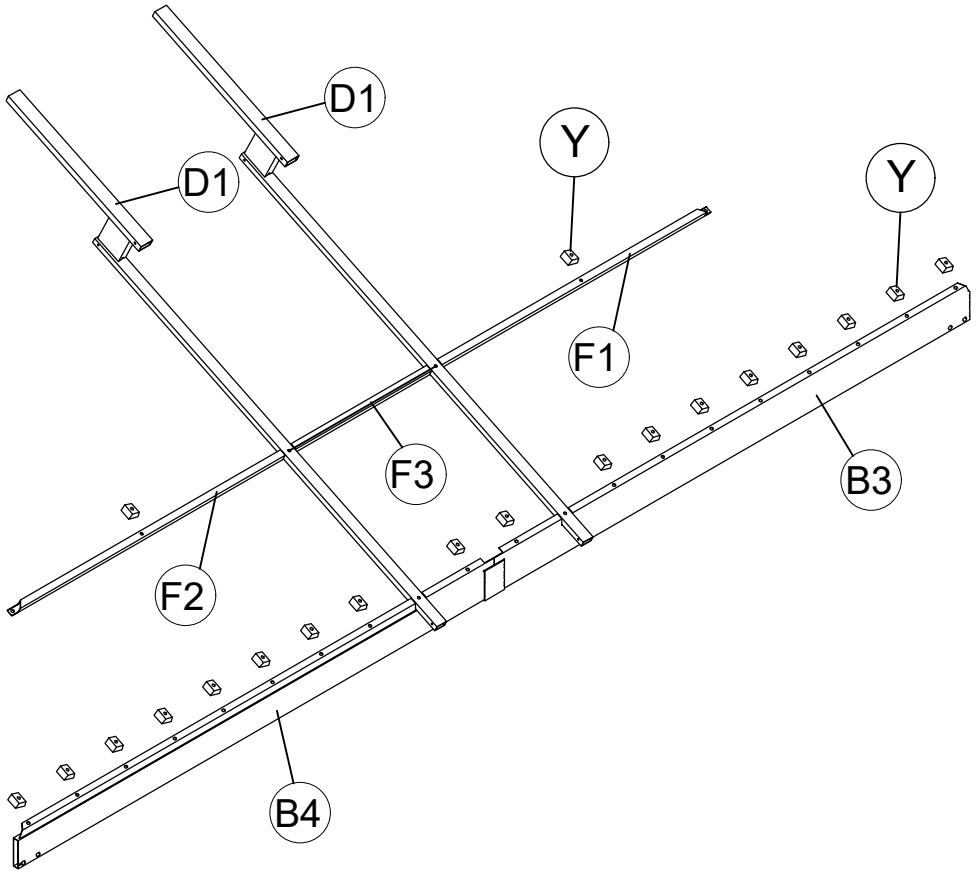

<18>

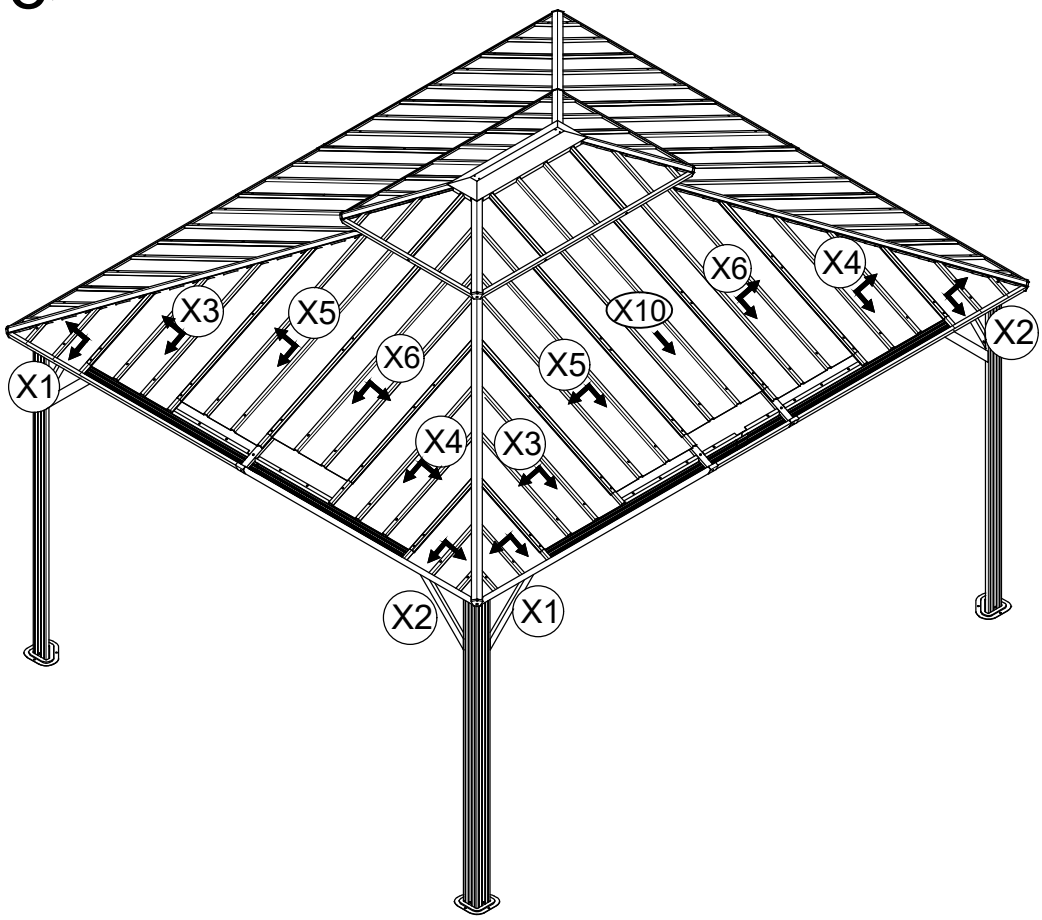

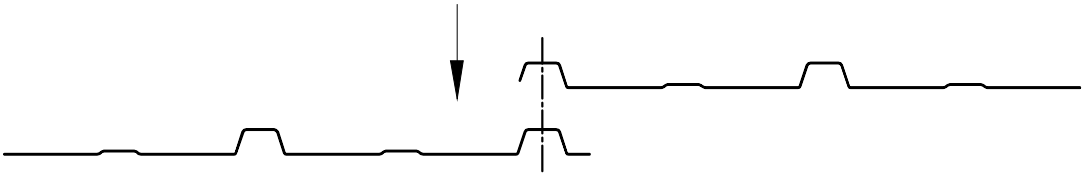

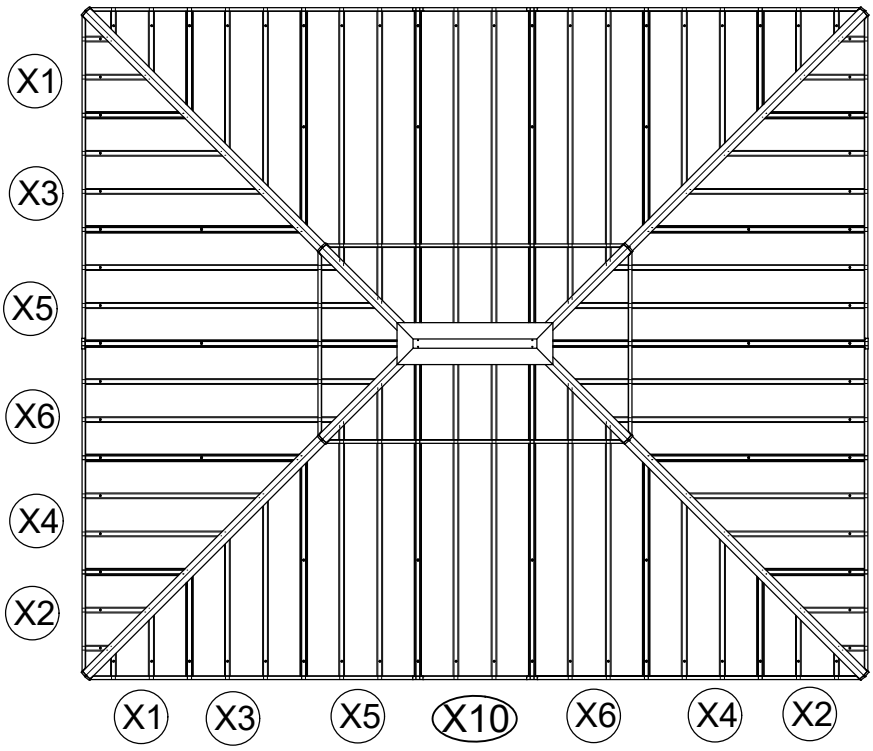



Y 76x

M6x25

3 12x



M6x23


2 68x




M6x45


7 8x


<19>

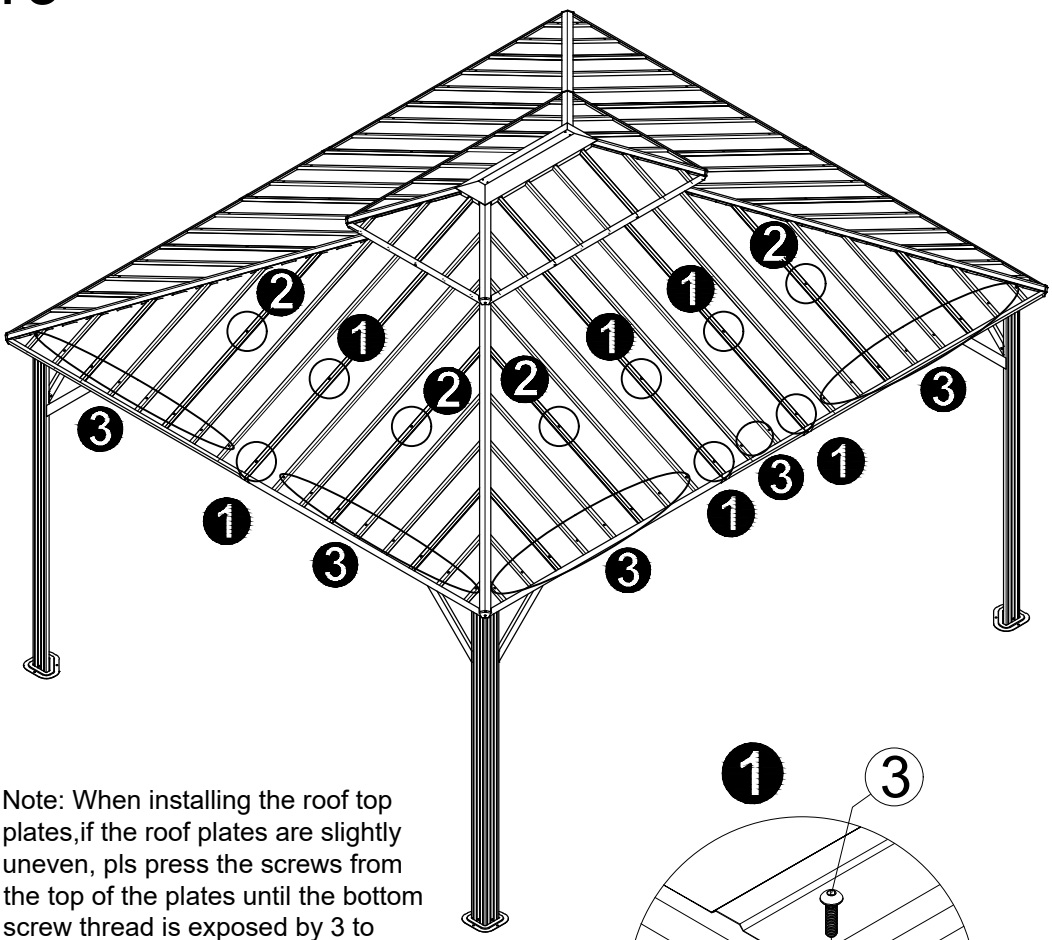


Note: When installing the roof top plates,if the roof plates are slightly uneven, pls press the screws from the top of the plates until the bottom screw thread is exposed by 3 to 4mm, and then screw on the nut.

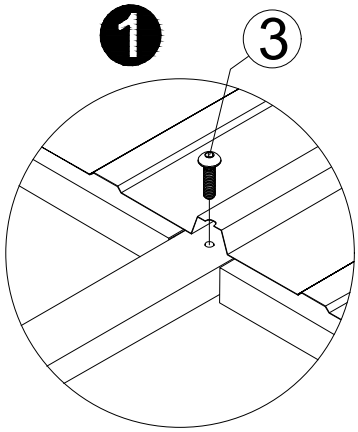

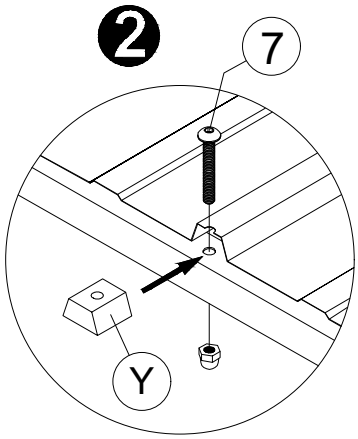

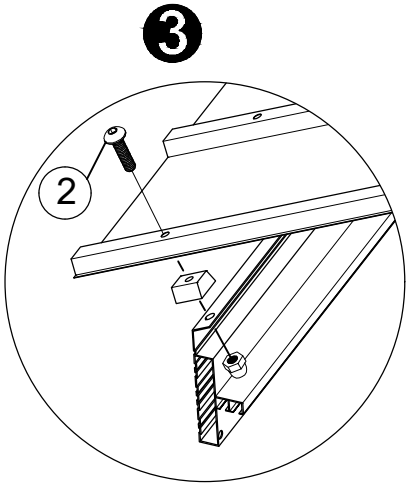





I1 2x



I2 2x



V1 2x



V2 2x



N 4x



M6x15


1 10x





M6x10


9 8x

<20>

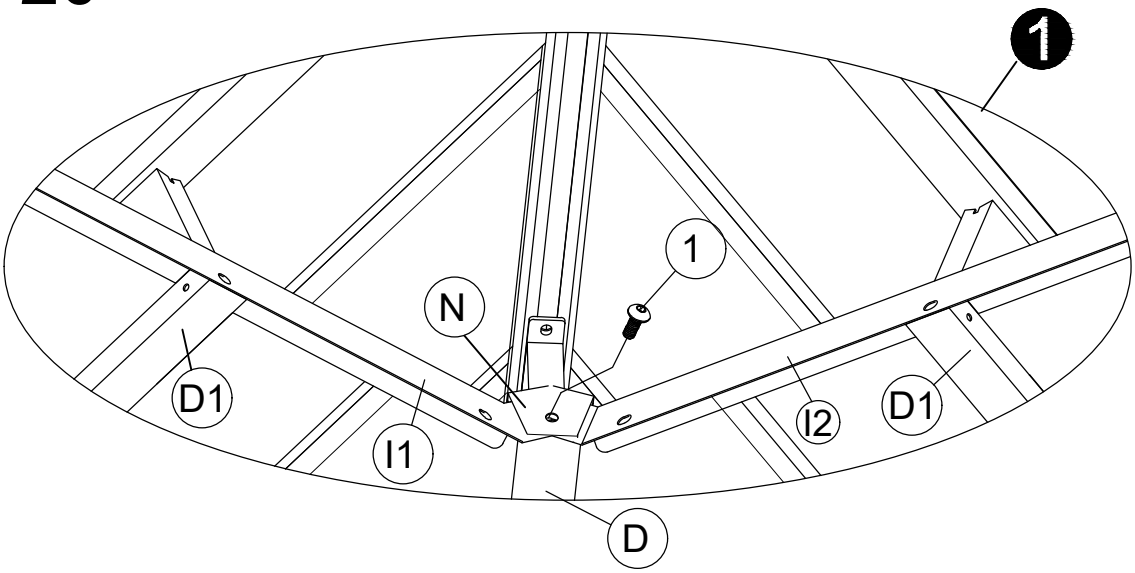

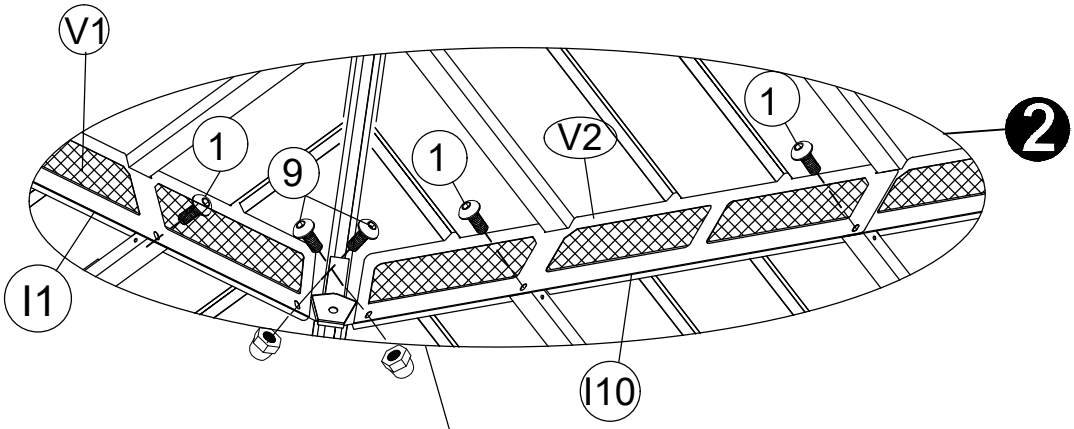


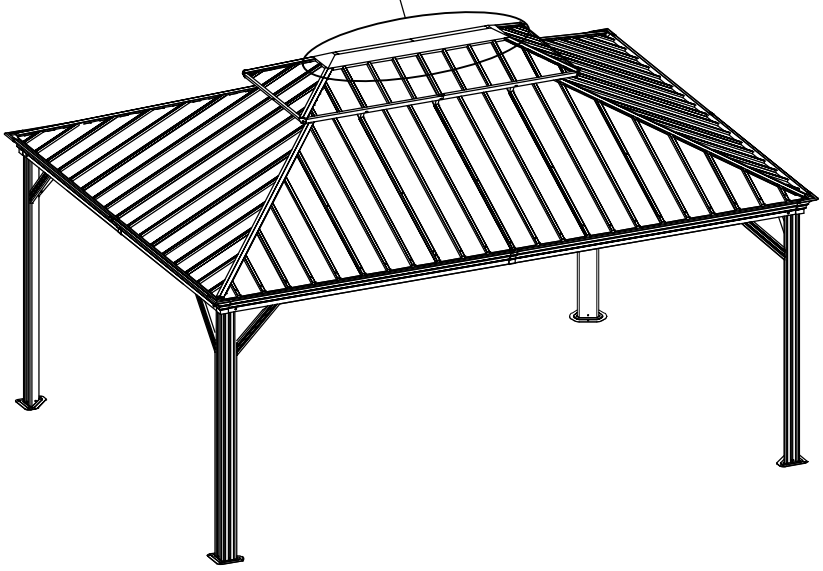






T 4x


<21>



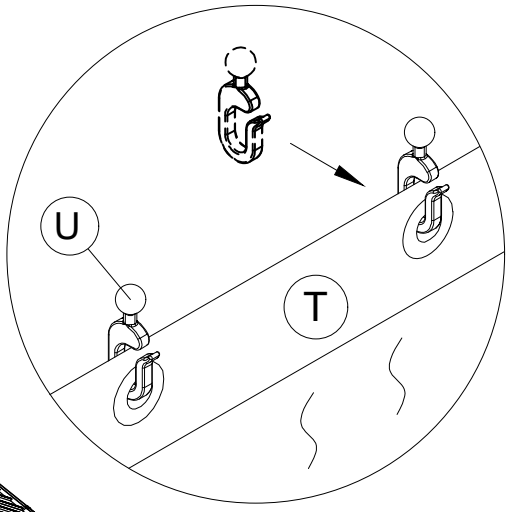

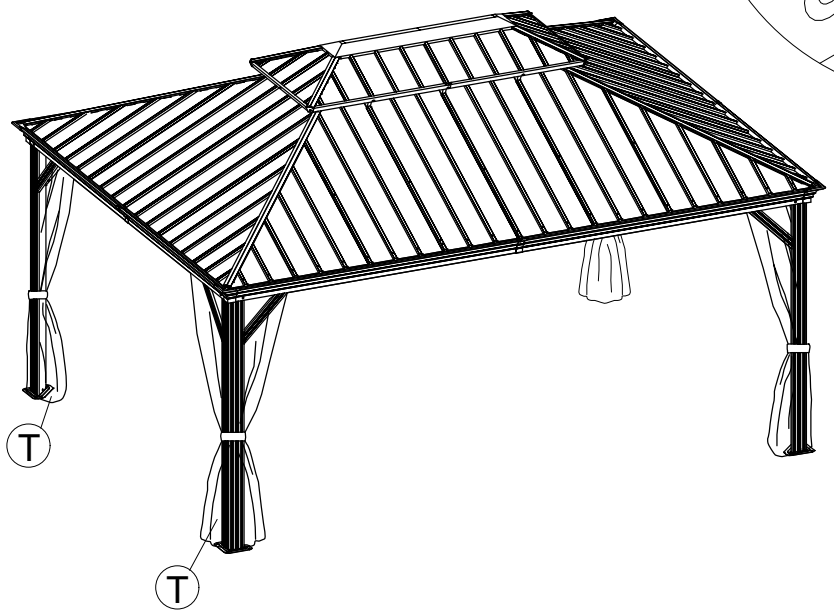


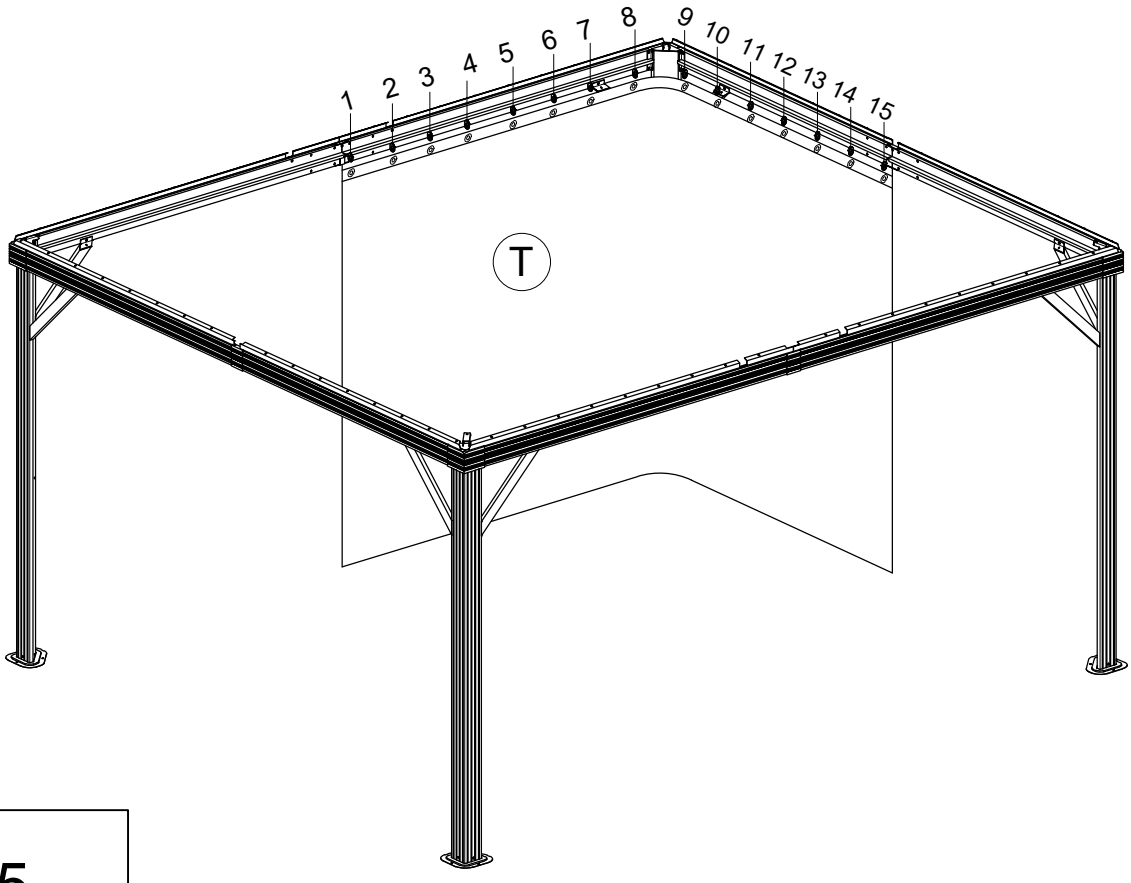






T1 4x

<22>



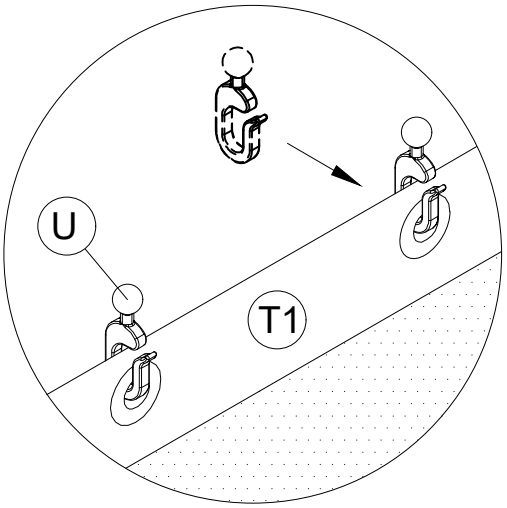

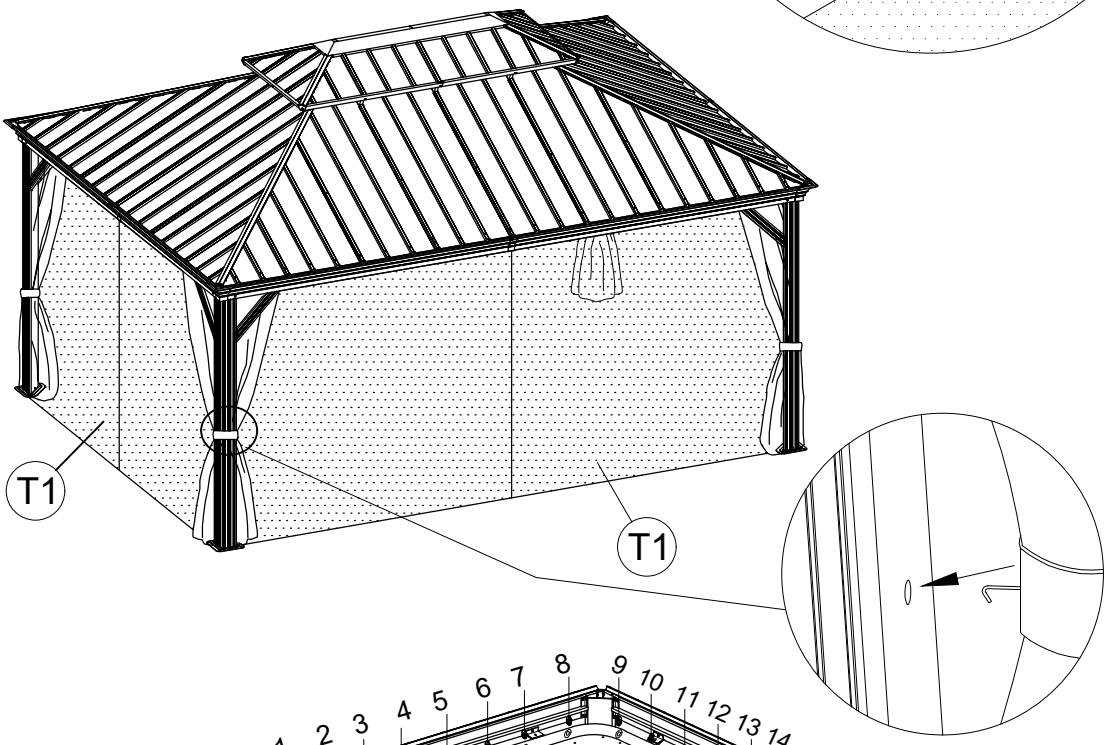

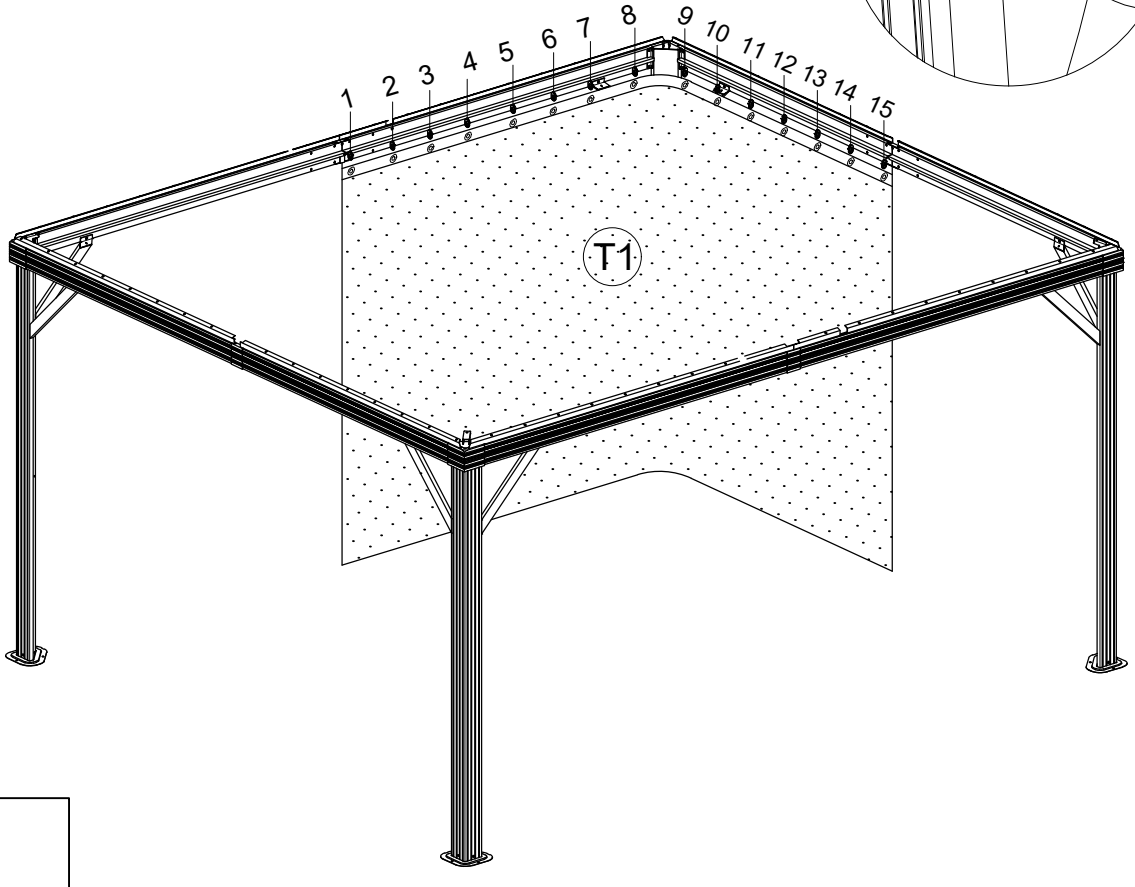

Carton-1/4	
Part	Qty
B1	2
B2	2
B3	2
B4	2
C1	4
C2	4
G2	2
V	4
Q1	6
Z	64
Z1	8
Z2	8
K	4
K1	4
N	12
N1	6
U	120
T	4
T1	4
1.2.3.4.5.7.8.9. 10.11.12.14.15	1
Q3	8
Q4	8

Carton-2/4	
Part	Qty
A	4

Carton-3/4	
Part	Qty
D	4
E5	4
D1	6
C3	2
G1	2
F1	4
F2	4
F3	2
I1	2
I2	2
M2	1
L2	1
P	4
H	4
H1	4
V1	2
V2	2
J	4
Y	76

Carton-4/4	
Part	Qty
X1	4
X2	4
X3	4
X4	4
X5	4
X6	4
X10	2
S1	4
S2	4
S3	2